
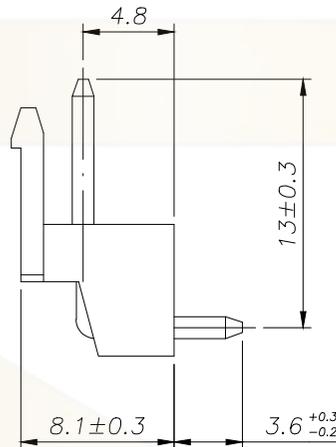



SPECIFICATIONS

- 1, Current Rating: 7A AC, DC
- 2, Voltage Rating: 250V AC, DC
- 3, Temperatuer Range: -40°C ~ +105°C
- 4, Contact Resistance: 20mΩ Max
- 5, Insulation Resistance: 1000mΩ Min
- 6, Withstanding Voltang: 1500V AC/minute
- 7, Material: Wafer Nylon66 UL94-V0(2)
PIN Brass Tin-plated

Circuit	Part NO.	Dimensions mm	
		A	B
2	HC-VH-2A2WD-G-05	3.96	7.92
3	HC-VH-3A3WD-G-05	7.92	11.88
4	HC-VH-4A4WD-G-05	11.88	15.84
5	HC-VH-5A5WD-G-05	15.84	19.80
6	HC-VH-6A6WD-G-05	19.80	23.76
7	HC-VH-7A7WD-G-05	23.76	27.72
8	HC-VH-8A8WD-G-05	27.72	31.68
9	HC-VH-9A9WD-G-05	31.68	35.64
10	HC-VH-10A10WD-G-05	35.64	39.60
11	HC-VH-11A11WD-G-05	39.60	43.56
12	HC-VH-12A12WD-G-05	43.56	47.52
13	HC-VH-13A13WD-G-05	47.52	51.48
14	HC-VH-14A14WD-G-05	51.48	55.44
15	HC-VH-15A15WD-G-05	55.44	59.40

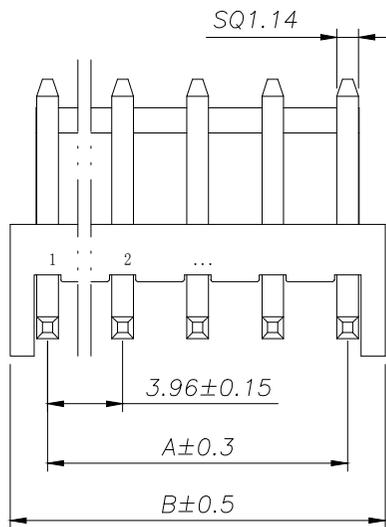

Ordering Information

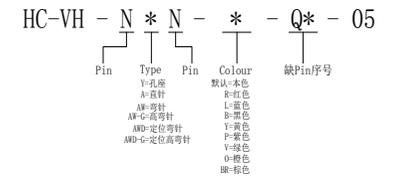

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM TOL	审核 CHECK					
			X.X ±0.30	批准 APPROVAL	产品名称 TITLE	VH (3.96)单排 定位 高弯针		版本 REV.	A
			X.XX ±0.20	比例 SCALE	产品料号 PART NO.	HC-VH-NANWD-G-05		单位 UNITS	mm
			X.XXX ±0.10	投影 Projection	材料 MATERIAL				
1	初版发行		Angle ±3.0°						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	页次 SHEET 1/1						