


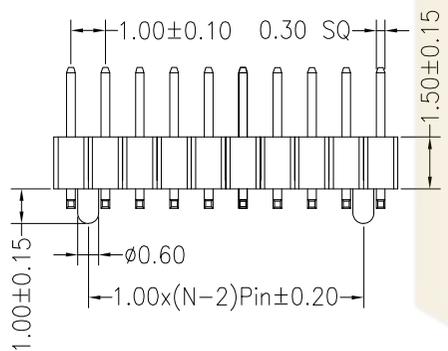
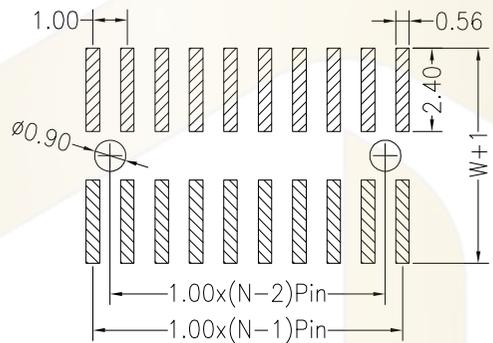


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

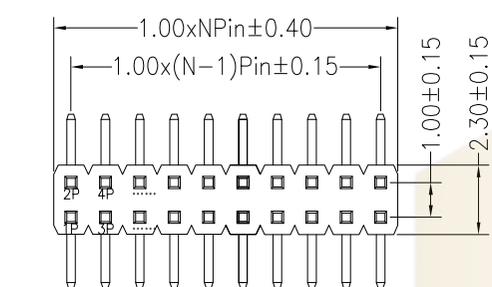

P = With Post

PB±0.25

默认 = W/O Post

SPECIFICATIONS  
 Rated Current:0.75AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 260° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	2.00	2.10	5.00	4.10

**Ordering Information**

PZ 100 - \* - N - \* - \* - \*\* - P

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2-50Pin	Type 2=直插 3=贴片 4=贴片	Length (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:5u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Post (焊柱)
---	------------------------	------------------------------	----------------	--	--------------

			GENERAL TOLERANCE	制图 DRAWING			
			DIM TOL	审核 CHECK			
			X.X ±0.30	批准 APPROVAL			
			X.XX ±0.20	比例 SCALE			
			X.XXX ±0.10	投影 Projection			
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°				

**深圳市华灿天禄电子有限公司**  
 ShenzhenhuacantianluELECTRONICS CO., LTD

产品名称 TITLE	1.00 双排 排针 贴片(塑高1.5)	版本 REV.	A
产品料号 PART NO.	PZ100-2-N-S-1.5-XX(L4.1)	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1