
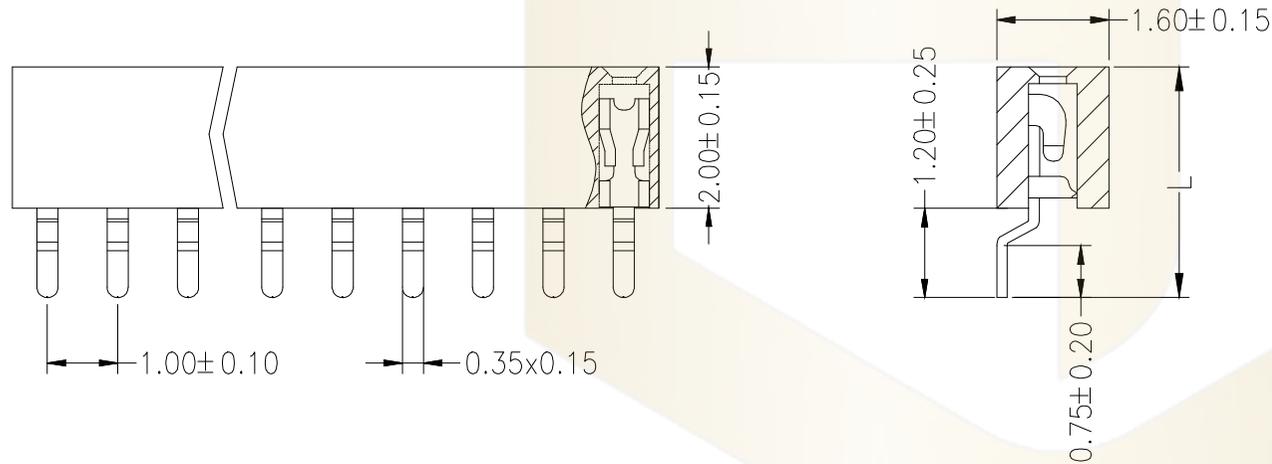
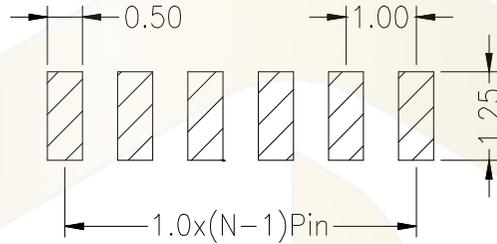


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE± 0.05)

**SPECIFICATIONS**  
 Rated Current:0.75AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c  
 Contact Material:Phosphor Bronze  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Soldering temperature: 260°C±5° 5S

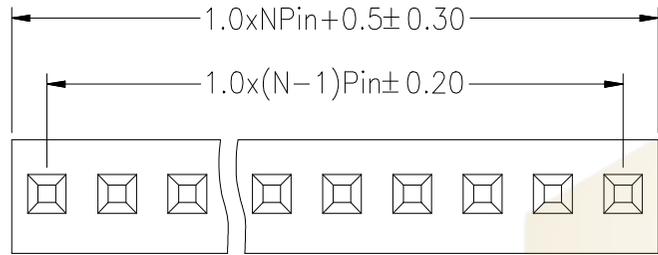

**Ordering Information**

PM 100 - \* - N - \* - \* - \*\*

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 02-40Pin	Type Z=直插 W=弯插 S=立贴 WS=带插	Length (塑料) (塑高)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	------------------------	---------------------------------------	------------------------	--

		GENERAL TOLERANCE		制图 DRAWING	03		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
		DIM	TOL	审核 CHECK				产品名称 TITLE	1.00单排 卧贴 排母 塑高2.0	版本 REV.	A
		X.X	±0.30	批准 APPROVAL				产品料号 PART NO.	PM100-1-N-WS-2.0-XX(L3.2)	单位 UNITS	mm
1	初版发行	X.XX	±0.20	比例 SCALE				材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投影 Projection							
			Angle ±3.0°								