
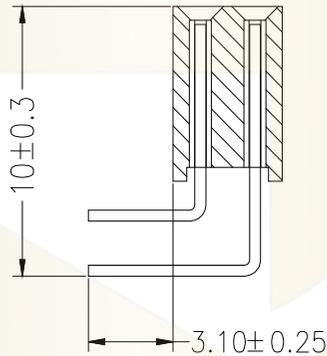
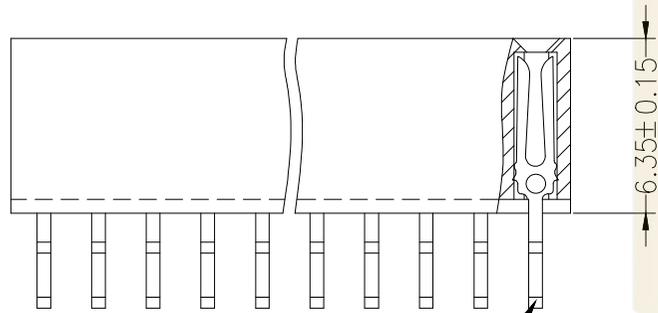
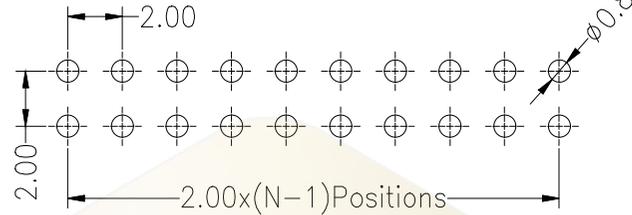


SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩMax
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩMin
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

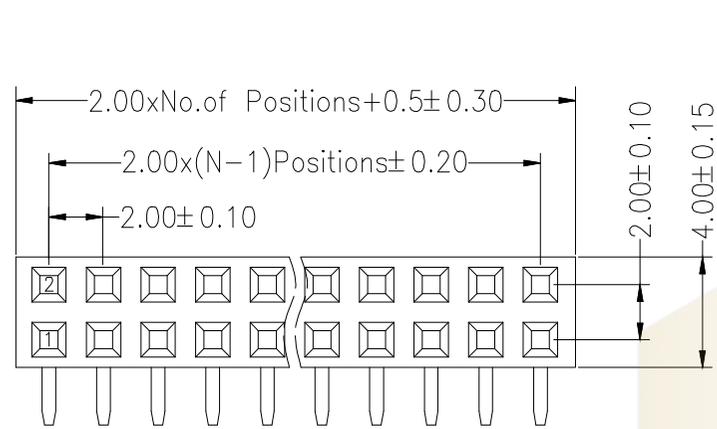

Ordering Information

PM 200 - * - N - W - * - **

No. of Rows
 1=Single Row
 2=Dual Row

No. of Pins
 2-40Pin

Type
 Z-直插
 W-弯插
 S-贴片

Length (mm)
 (塑高)

Contact Plating
 G0:Gold Flash
 G1:1u" Gold
 G2:3u" Gold
 G3:5u" Gold
 G4:10u" Gold
 G5:15u" Gold
 G6:30u" Gold
 S0:Gold Flash/Tin
 S1:Tin

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK					
			X. X	±0.30	批准 APPROVAL		产品名称 TITLE	2.00双排 排母 弯插(塑高6.35)	版本 REV.	A
1			初版发行		比例 SCALE		产品料号 PART NO.	PM200-2-N-W-6.35-XX(L10.0)	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投影 Projection		材料 MATERIAL		页次 SHEET	1/1