


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

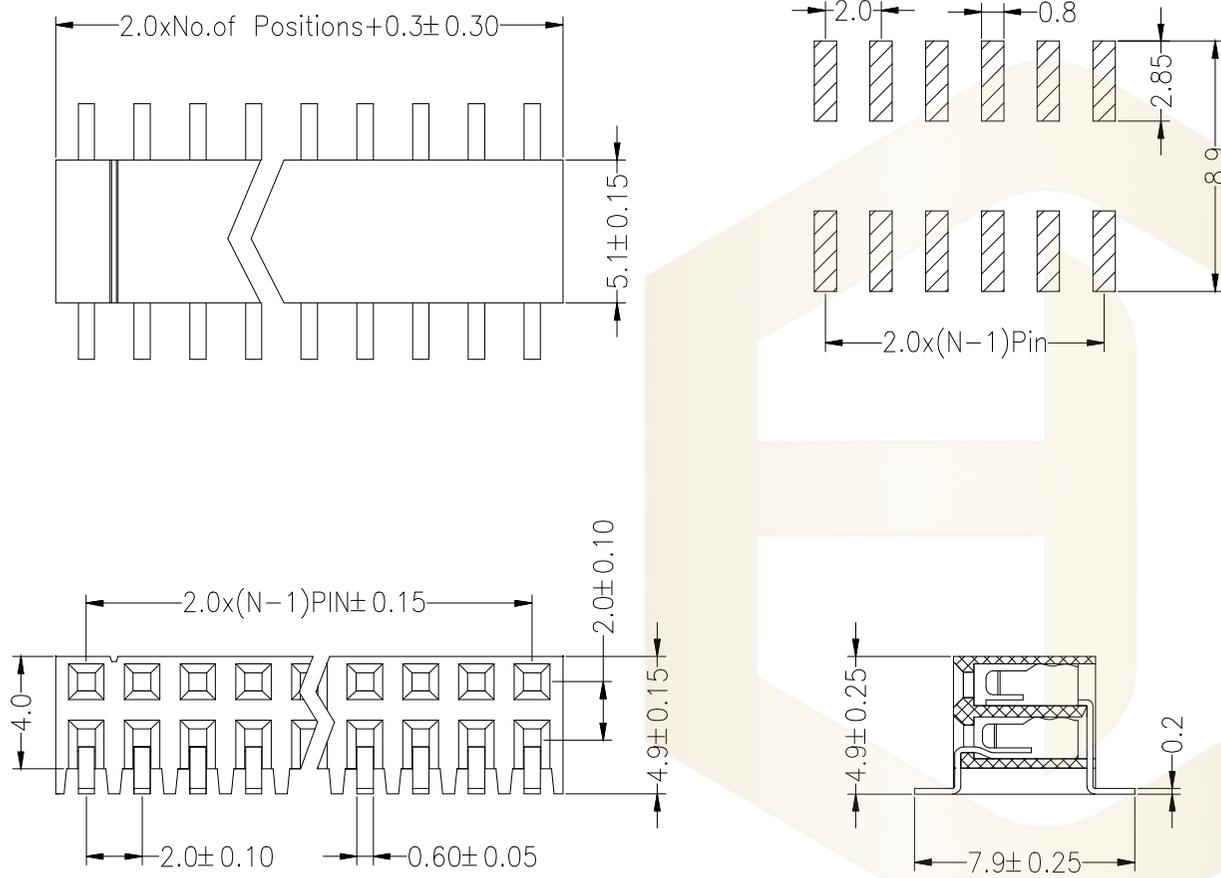

Ordering Information

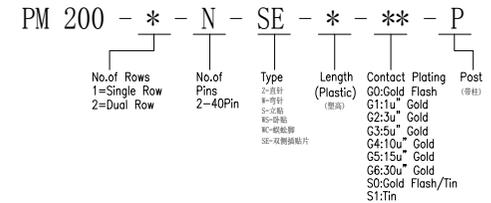

			GENREL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK		产品名称 TITLE		2.00双侧插 贴片 排母 塑高4.0	版本 REV.	A
			X. X	±0.30	批 准 APPROVAL		产品料号 PART NO.		PM200-2-N-SE-4.0-XX (L4.9)	单 位 UNITS	mm
			X. XX	±0.20	比 例 SCALE		投 影 Projection		材料 MATERIAL	页 次 SHEET	1/1
			X. XXX	±0.10	角 度 ANGLE						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°							