



Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

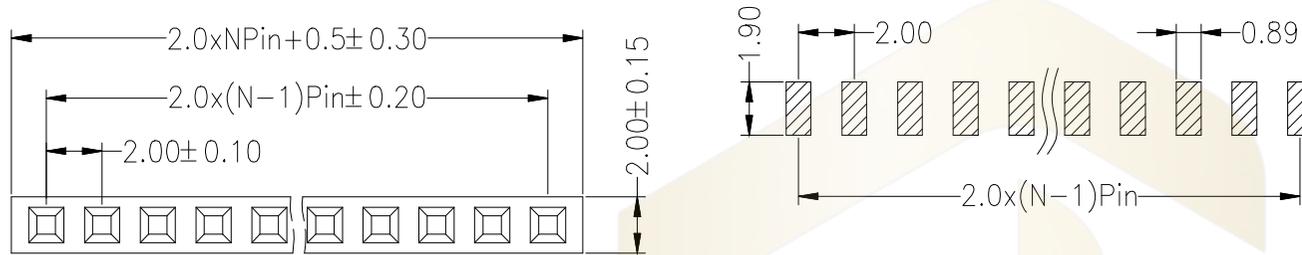

SPECIFICATIONS

Rated Current:2.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Soldering temperature: 260°C±5° S5

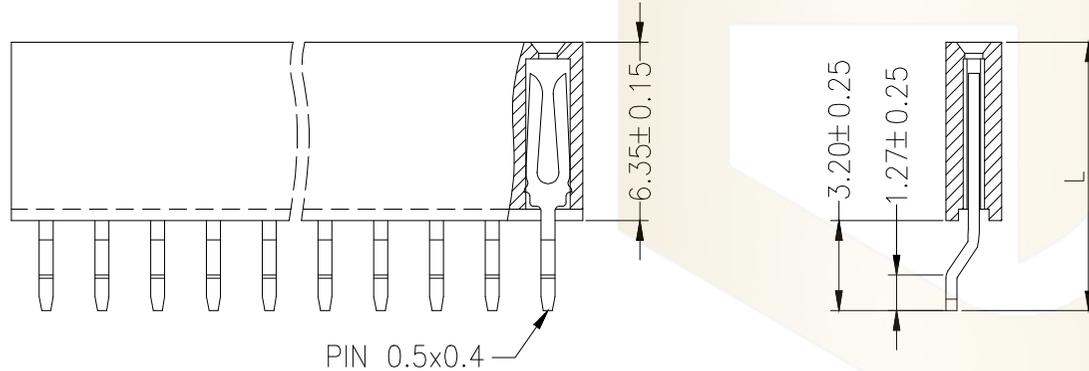

Ordering Information

PM 200 - \* - N - WS - \* - \*\*

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type Z-直针 R-弯针 S-立轴 MS-扁轴	Length (Plastic) (塑高)	Contact Plating C0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	---------------------------------------	-----------------------------	--

			GENREL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审核 CHECK		产品名称 TITLE		2.00单排 排母 卧贴 塑高6.35	版本 REV.	A
			X.X	±0.30	批准 APPROVAL		产品料号 PART NO.		PM200-1-N-WS-6.35-XX(L9.55)	单位 UNITS	mm
1			初版发行		比例 SCALE		材料 MATERIAL			页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投影 Projection						