



Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

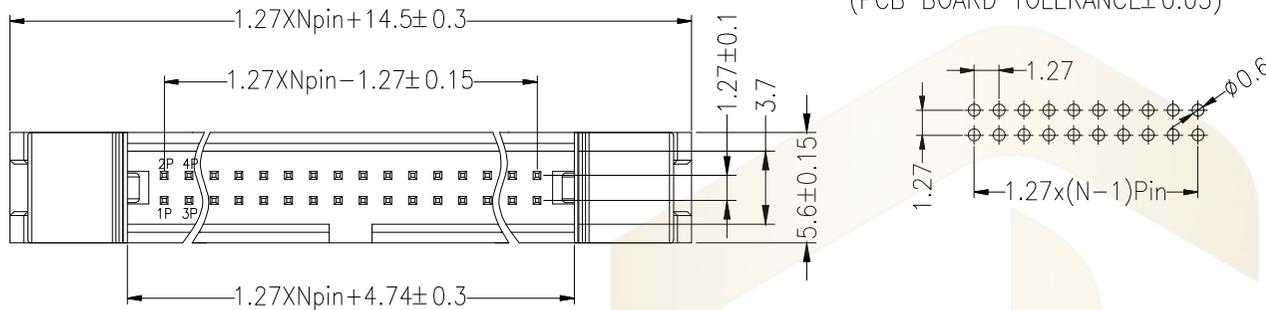


**SPECIFICATIONS**

Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

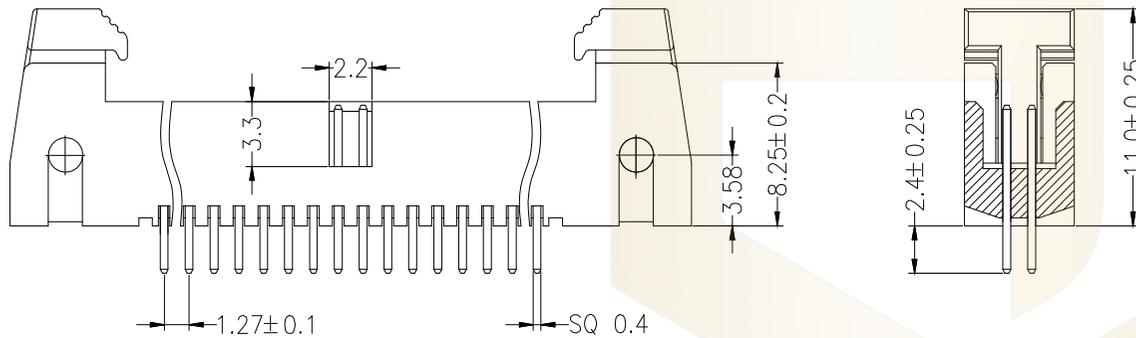

**Ordering Information**

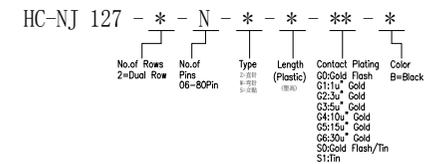

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
			DIM	TOL	审核 CHECK				
			X.X	±0.30	批准 APPROVAL		产品名称 TITLE		1.27 牛角 直针
			X.XX	±0.20	比例 SCALE		产品料号 PART NO.		版本 REV.
			X.XXX	±0.10	投影 Projection		HC-NJ127-2-N-2-11.0-XX-B		A
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	材料 MATERIAL		单位 UNITS		页次 SHEET
							mm		1/1