




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

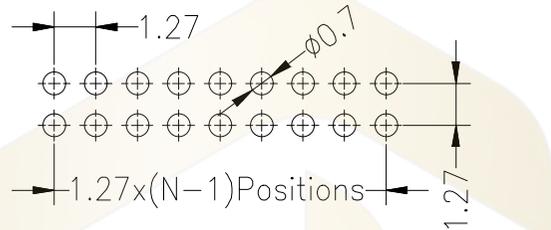

SPECIFICATIONS


Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

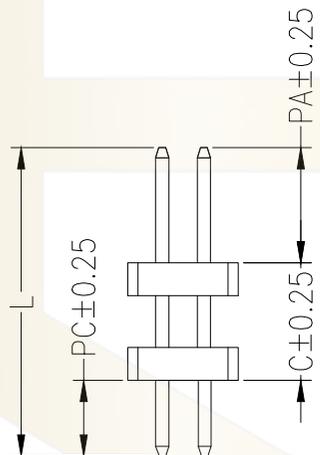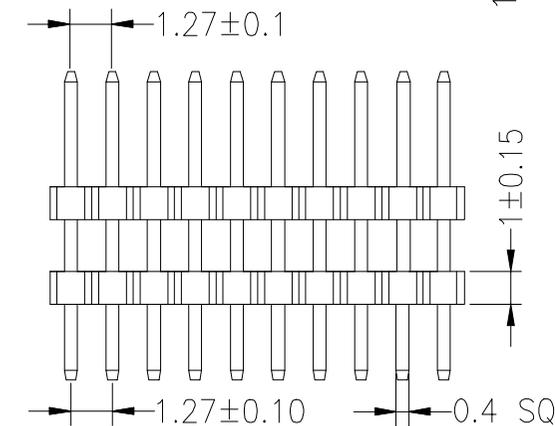

Dimension antitheses list				
ITEM	PA	PC	C	L
Standard	3.90	2.30	3.50	9.70
Alternate				

**Ordering Information**

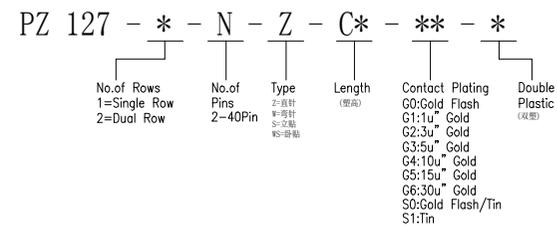

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK				
			X.X ±0.30	批准 APPROVAL	产品名称 TITLE	1.27 双排 双塑 直排针	版本 REV.	A
			X.XX ±0.20	比例 SCALE	产品料号 PART NO.	PZ127-2-N-Z-C3.5-XX-DP(L9.7)	单位 UNITS	mm
			X.XXX ±0.10	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					