
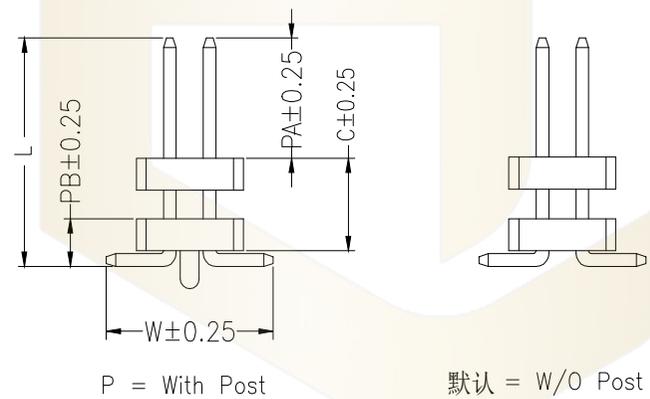


**SPECIFICATIONS**  
 Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Dimension antitheses list					
ITEM	PA	PB	C	W	L
Standard	4.00	1.50	3.50	5.50	8.00
Alternate					

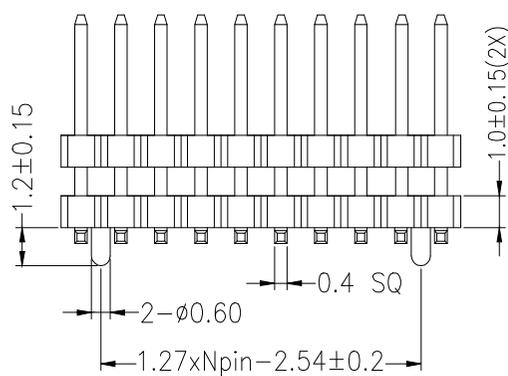

**Ordering Information**

PZ 127 - \* - N - S - C\* - \*\* - DP - P

No. of Rows  
 1=Single Row  
 2=Dual Row

No. of Pins  
 2-40Pin

Type  
 Z=直插  
 F=弯插  
 S=立插  
 W=带插

(双型间距)

Contact Plating  
 G0:Gold Flash  
 G1:1u" Gold  
 G2:3u" Gold  
 G3:5u" Gold  
 G4:10u" Gold  
 G5:15u" Gold  
 G6:30u" Gold  
 S0:Gold Flash/Tin  
 S1:Tin

Double Plastic (双塑)  
 Post (带柱)

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核 CHECK		产品名称 TITLE	1.27双排 双塑 排针 贴片	版本 REV.	A
			X.X	±0.30	批准 APPROVAL		产品料号 PART NO.	PZ127-2-N-S-C3.5-XX-DP(L8.0)	单位 UNITS	mm
1	初版发行		X.XX	±0.20	比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX	±0.10	投影 Projection					
			Angle	±3.0°						