


SPECIFICATIONS
 Rated Current:1.0AMP
 Contact Resistance:20mΩMax
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩMin
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

| Pitch | H (mm) |
|--------|--------|
| 1.27mm | 2.0 |
| | 2.15 |
| | 3.4 |
| | 4.3 |
| | 4.6 |
| | 5.7 |
| | 8.5 |

Ordering Information

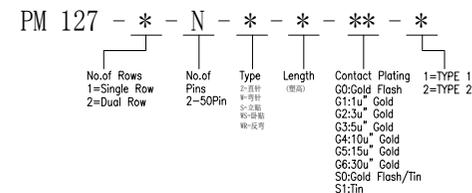

| | | | GENERAL TOLERANCE | | 制图 DRAWING | | 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD | | | |
|---------------------|--|--|-------------------|-------|---------------|--|---|--|----------|-----|
| | | | DIM | TOL | 审核 CHECK | | 产品名称 TITLE | | 版本 REV. | A |
| | | | X.X | ±0.30 | 批准 APPROVAL | | 1.27 单排 排母 贴片 塑高4.3 | | | |
| 1 初版发行 | | | X.XX | ±0.20 | 比例 SCALE | | 产品料号 PART NO. | | 单位 UNITS | mm |
| 序号 No. | | | X.XXX | ±0.10 | 投影 Projection | | PM127-1-N-S-4.3-XX-X(L4.6) | | 页次 SHEET | 1/1 |
| 变更内容 MODIFY CONTENT | | | Angle | ±3.0° | | | 材料 MATERIAL | | | |
| 日期 MODIFY DATE | | | | | | | | | | |