
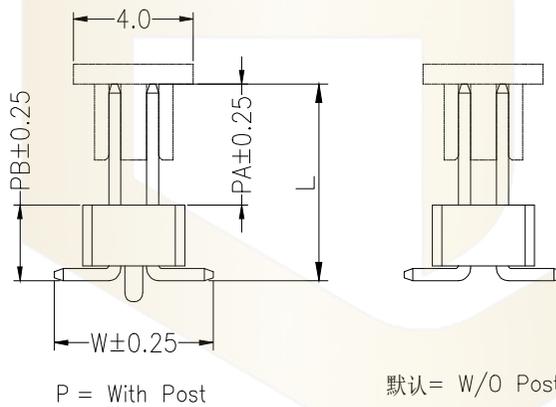
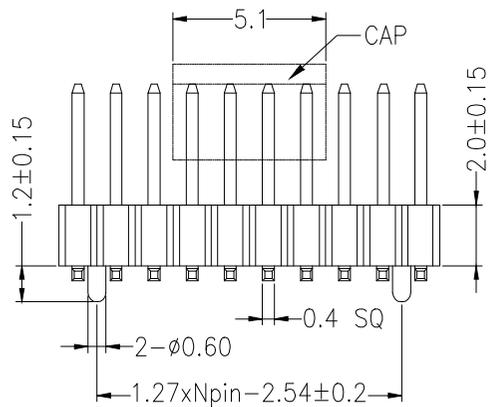


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

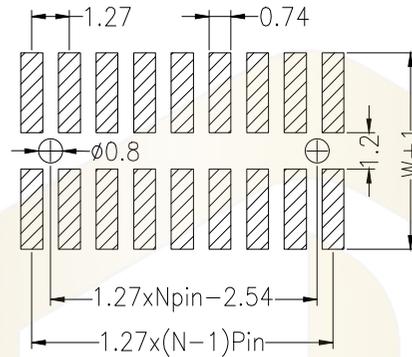

默认= W/O Post

SPECIFICATIONS


Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Pitch	塑高变量 (mm)
1.27mm	0.85
	1.0
	1.5
	1.7
	2.0
	2.5

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	2.50	5.50	6.30

Ordering Information

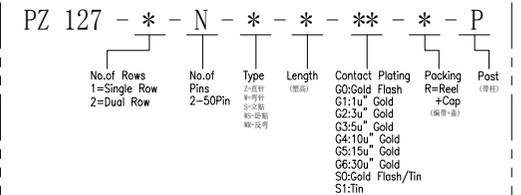

			GENEAL TOLERANCE		制 图		深圳市华灿天禄电子有限公司					
			DRAWING		DRAWING		ShenzhenhuacantianluELECTRONICS CO., LTD					
			审 核		审 核		产品名称		1.27 双排 排针 贴片 编带+盖		版本	
			CHECK		CHECK		TITLE		(塑高2.0)		REV.	
			批 准		批 准		PART NO.		PZ127-2-N-S-2.0-XX-R(L6.3)		单 位	
			APPROVAL		APPROVAL		SCALE		mm		UNITS	
			X.X ±0.30		X.XX ±0.20		SCALE		材料		页 次	
			X.XXX ±0.10		X.XXX ±0.10		SCALE		Material		SHEET	
			Angle ±3.0°		Angle ±3.0°		Projection		Material		1/1	
序号	变更内容	日期										
No.	MODIFY CONTENT	MODIFY DATE										
1	初版发行											