
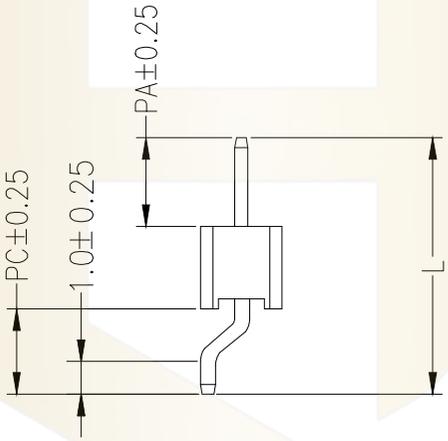


SPECIFICATIONS  
 Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.00	2.40	7.90
Alternate			

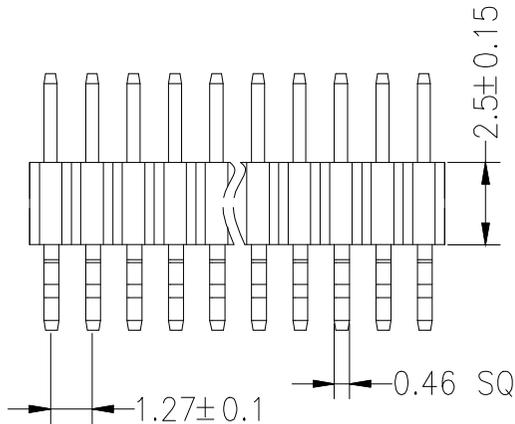

**Ordering Information**

PZ 127 - \* - N - WS - \* - \*\*

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 1-50Pin	Type □=直插 □=弯插 □=贴片	Length (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	------------------------------	----------------	--

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	1.27单排 排针 贴片 编带+盖 (塑高2.5)	版本 REV.	A
			X.X ± 0.30	批准 APPROVAL	产品料号 PART NO.	PZ127-1-N-WS-2.5-XX(L7.9)	单位 UNITS	mm
			X.XX ± 0.20	比例 SCALE	投影 Projection		页次 SHEET	1/1
			X.XXX ± 0.10	角度 Angle	材料 MATERIAL			
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ± 3.0°					