
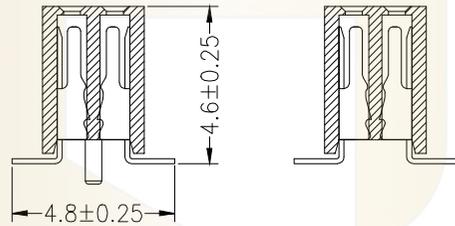
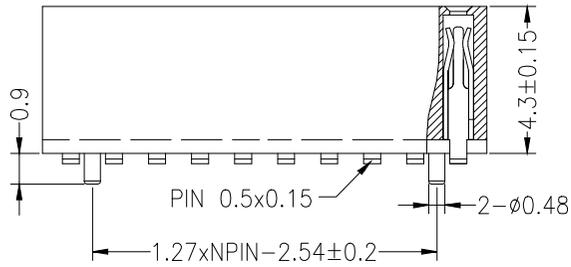
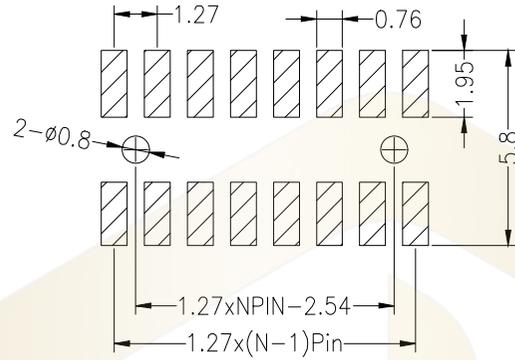


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

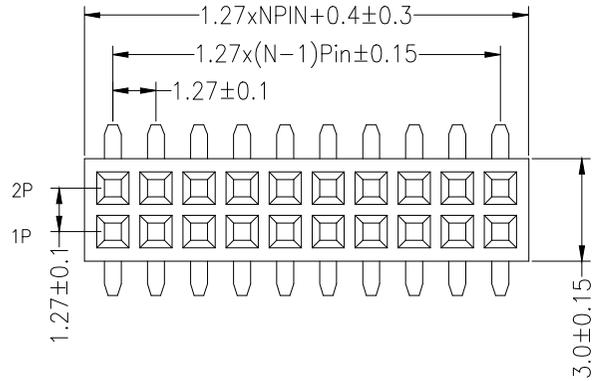

P= With Post


默认 = W/O Post

SPECIFICATIONS

Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze  
Contact Plating:Au Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

Ordering Information

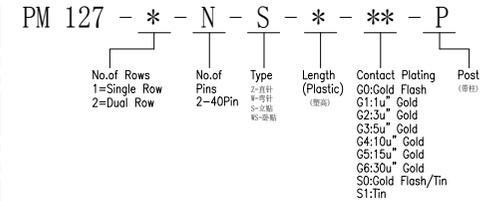

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK		产品名称 TITLE	1.27双排 排母 贴片 塑高4.3	版本 REV.	A
			X.X	±0.30	批准 APPROVAL		产品料号 PART NO.	PM127-2-N-S-4.3-XX (L4.6)	单位 UNITS	mm
			X.XX	±0.20	比例 SCALE				页次 SHEET	1/1
			X.XXX	±0.10	投影 Projection		材料 MATERIAL			
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°						