

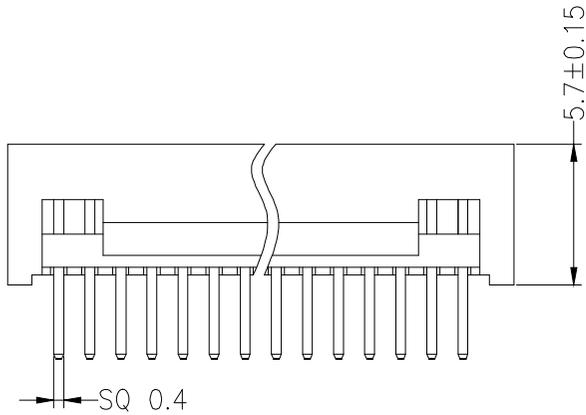
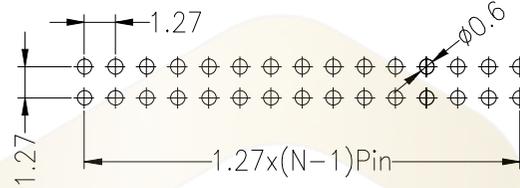


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

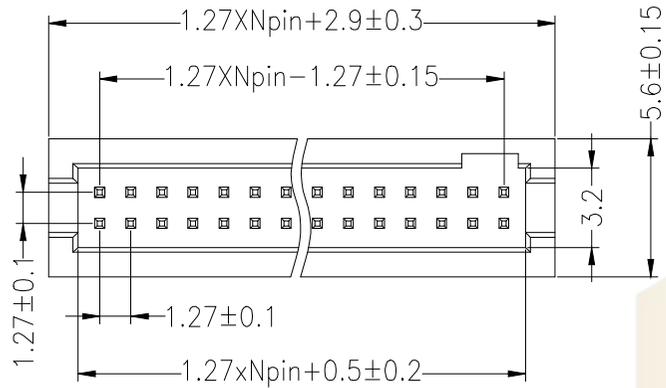

SPECIFICATIONS  
 Rated Current:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MQ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**Ordering Information**

HC-JN 127 - \* - N - Z - \* - \*\*

No.of Rows  
 1=Single Row  
 2=Dual Row

No.of Pins  
 10-100Pin

Type  
 2-直插  
 4-弯插  
 5-插板

Length  
 (Plastic)  
 (mm)

Contact Plating  
 G0:Gold Flash  
 G1:1u" Gold  
 G2:3u" Gold  
 G3:5u" Gold  
 G4:10u" Gold  
 G5:15u" Gold  
 G6:30u" Gold  
 S0:Gold Flash/Tin  
 S1:Tin

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核 CHECK					
			X.X	±0.30	批准 APPROVAL		产品名称 TITLE	筒牛1.27 双排 直针	版本 REV.	A
			X.XX	±0.20	比例 SCALE		产品料号 PART NO.	HC-JN127-2-N-Z-5.7-XX	单位 UNITS	mm
			X.XXX	±0.10	投影 Projection		材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°						