

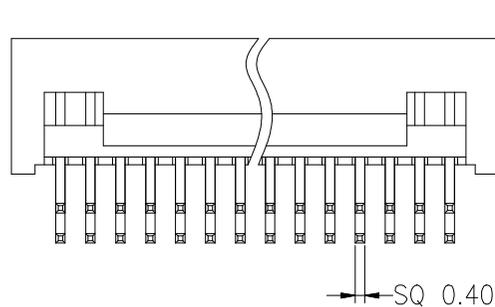


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

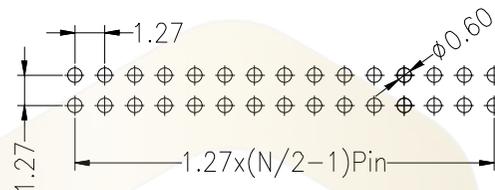

SPECIFICATIONS
 Rated Current:1.0AMP
 Contact Resistance:20mΩMax
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩMin
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245° C ± 5° C, 10s(PBT insulator)
 260° C ± 5° C, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

HC-JN 127 - * - N - W - * - **

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 10-100Pin	Type Z-直针 R-弯针 S-弯插	Length (塑料) (铜壳)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-------------------------	------------------------------	------------------------	--

			GENREL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK		产品名称 TITLE		版本 REV.	A
			X. X	±0.30	批 准 APPROVAL		简牛1.27 双排 弯针			
1			初版发行		比 例 SCALE		产品料号 PART NO.		单 位 UNITS	mm
序号 No.			变更内容 MODIFY CONTENT	日期 MODIFY DATE	投 影 Projection		材料 MATERIAL		页 次 SHEET	1/1
			X. XX	±0.20	材 料 MATERIAL		HC-JN127-2-N-W-5.7-XX			
			X. XXX	±0.10	投 影 Projection					
			Angle	±3.0°						