
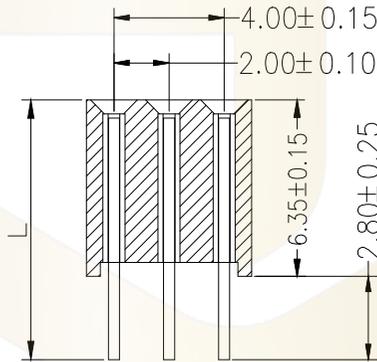
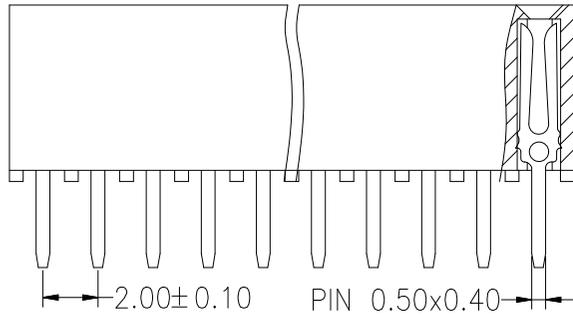
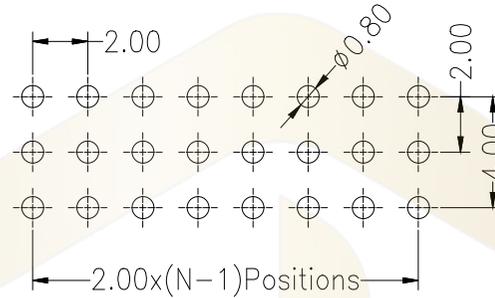


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

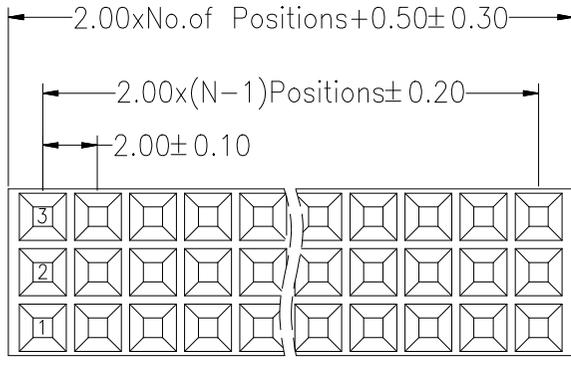

SPECIFICATIONS

Rated Current:2.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Resistance To Soldering Heat:  
245°C±5°C, 10s(PBT insulator)  
260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

Pitch	H (mm)
2.00mm	4.3
	4.6
	6.35
	7.2
	9.35

**Ordering Information**

PM 200 - \* - N - \* - \* - \*\*

No. of Rows  
1=Single Row  
2=Dual Row  
3=Triple Row

No. of Pins  
2-40Pin

Type  
S-直插  
D-贴片  
M-贴片

Length (mm)

Contact Plating  
G0:Gold Flash  
G1:1u" Gold  
G2:3u" Gold  
G3:5u" Gold  
G4:10u" Gold  
G5:15u" Gold  
G6:30u" Gold  
S0:Gold Flash/Tin  
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK		产品名称 TITLE	2.00 三排 排母 直针 塑高6.35	版本 REV.	A
			X.X	±0.30	批 准 APPROVAL		产品料号 PART NO.	PM200-3-N-Z-6.35-XX(L9.15)	单 位 UNITS	mm
1	初版发行		X.XX	±0.20	比 例 SCALE		材 料		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX	±0.10	投 影 Projection		MATERIAL			
			Angle	±3.0°						