

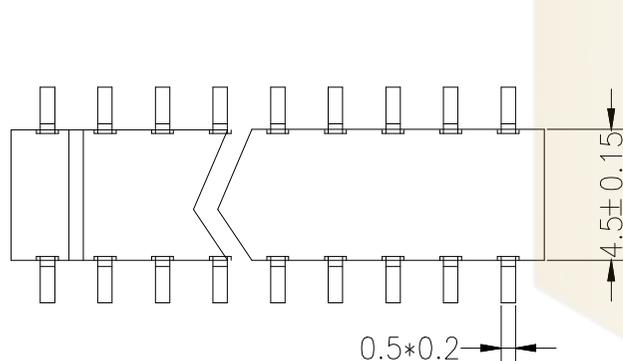
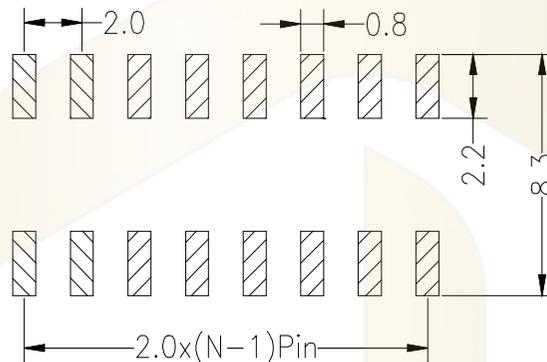


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE± 0.05)

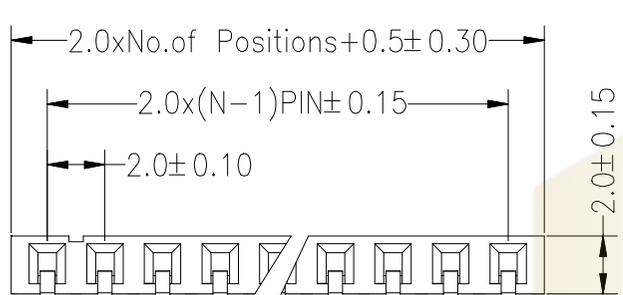

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩMax
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

PM 200 - * - N - SE - * - **

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type Z-直针 F-弯针 S-立轴 WS-弯轴 WC-板贴脚 SD-双侧贴片 SP-双侧插板	Length (Plastic) (英寸)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold
--	-----------------------	---	-----------------------------	---

			GENEAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuaciantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK					
			X.X	±0.30	批准 APPROVAL		产品名称 TITLE	2.00单排 双侧贴片 排母 塑高4.5	版本 REV.	A
			X.XX	±0.20	比例 SCALE		产品料号 PART NO.	PM200-1-N-SE-4.5-XX(L7.3)	单位 UNITS	mm
			X.XXX	±0.10	投影 Projection		材料 MATERIAL		页次 SHEET	1/1
1	初版发行		Angle	±3.0°						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE								