
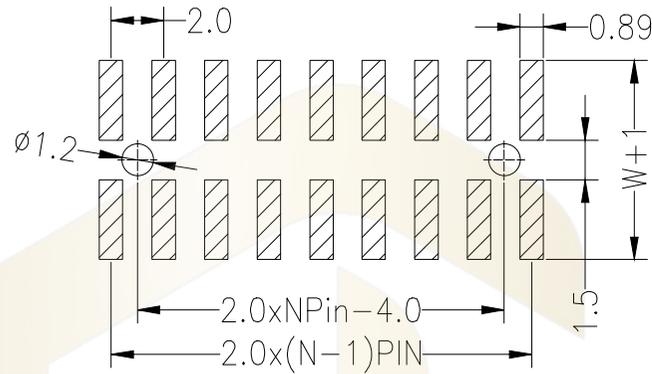




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS
 Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

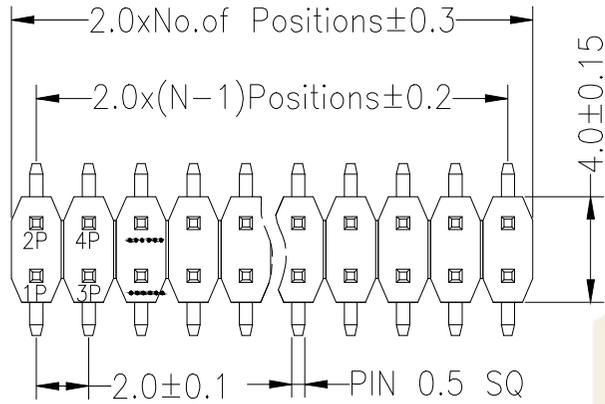


Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	2.50	6.50	6.30
Alternate				

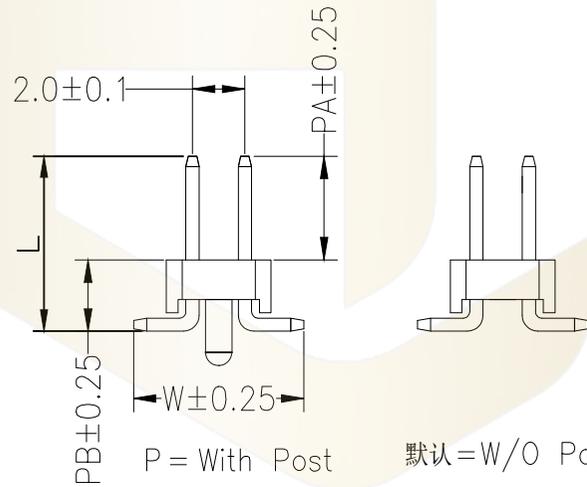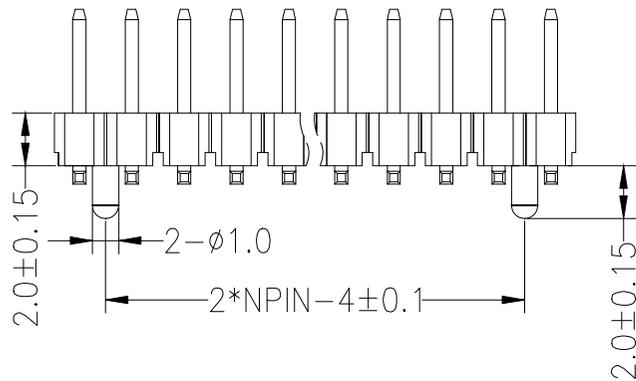

P = With Post 默认 = W/O Post

Ordering Information

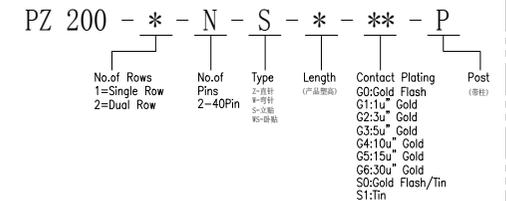

			GENREL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审核 CHECK		产品名称 TITLE		2.00双排 排针 贴片(塑高2.0)	版本 REV.	A
			X.X	±0.30	批准 APPROVAL		产品料号 PART NO.		PZ200-2-N-S-2.0-XX(L6.3)	单位 UNITS	mm
1			初版发行		日期 MODIFY DATE		材料 MATERIAL			页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投影 Projection						