
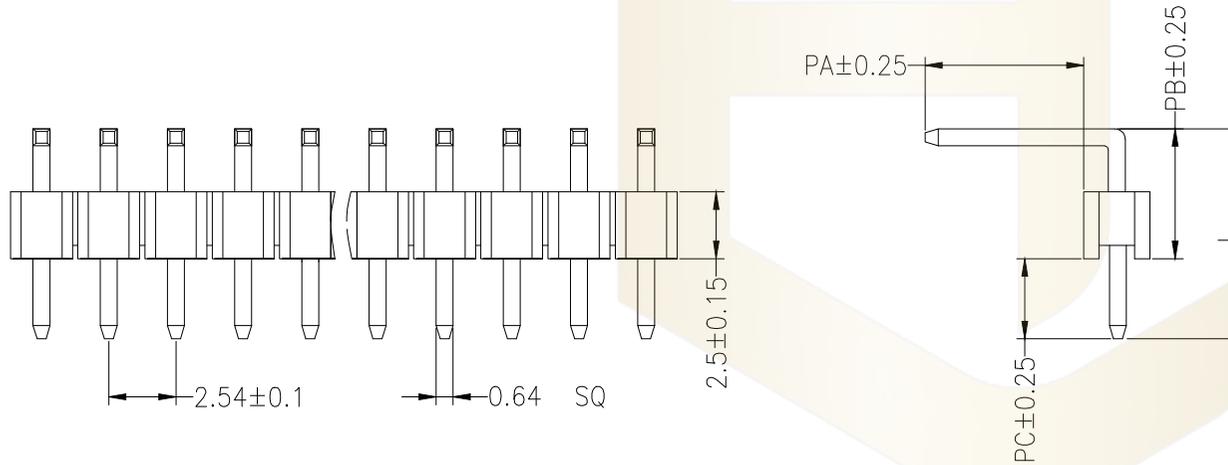


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

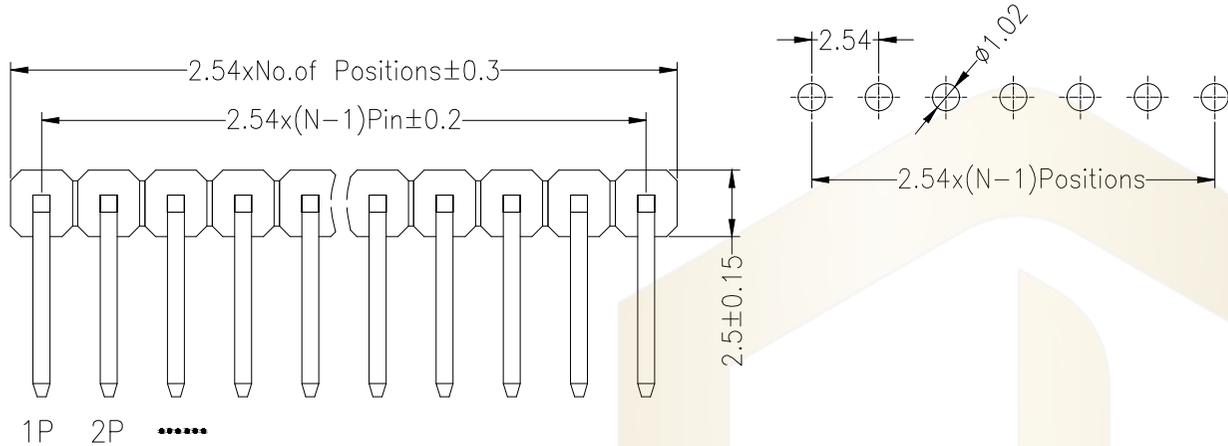

SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.00	4.40	3.00	7.40
Alternate				

Ordering Information

PZ 254 - * - N - W - * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 1=40Pin	Type ①=直插 ②=弯插 ③=贴片 ④=贴片	Length (mm)	Contact Plating G0:Gold Flash G1:11" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
---	------------------------	--------------------------------------	----------------	--

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK		产 品 名 称 TITLE	2.54双排 反弯排针 (塑高2.5)	版 本 REV.	A
			X. X	±0.30	批 准 APPROVAL		产 品 料 号 PART NO.	PZ254-1-N-WR-2.5-XX (L7.4)	单 位 UNITS	mm
			X. XX	±0.20	比 例 SCALE		材 料 MATERIAL		页 次 SHEET	1/1
			X. XXX	±0.10	投 影 Projection					
序 号 No.	变 更 内 容 MODIFY CONTENT	日 期 MODIFY DATE	Angle	±3.0°						