
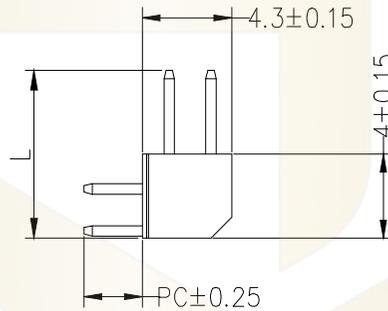
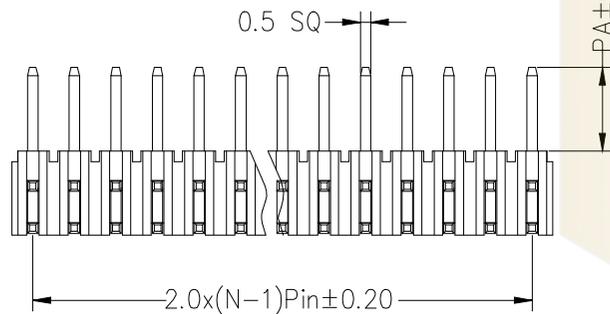


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

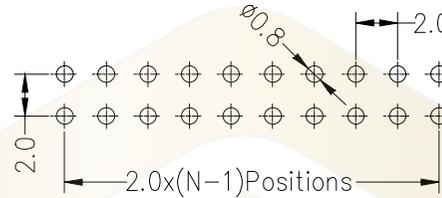

SPECIFICATIONS
 Rated Current: 3 AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T
 UNSPECIFIED TOLERANCE: ±0.20

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.80	8.00
Alternate			

Ordering Information

PZ 200 - * - N - * - * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2=20Pin 4=40Pin S=50Pin P=80Pin	Type	Length (Plastic) (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
---	---	------	--------------------------	--

			GENREL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK						
			X. X	±0.30	批 准 APPROVAL		产品名称 TITLE		2.00双排 排针 侧弯 塑高4.0	版本 REV.	A
1			初版发行		X. XX		产品料号 PART NO.		PZ200-2-N-F-4.0-XX (L8.0)	单 位 UNITS	mm
序号 No.			变更内容 MODIFY CONTENT		日 期 MODIFY DATE		投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1
			Angle	±3.0°							