
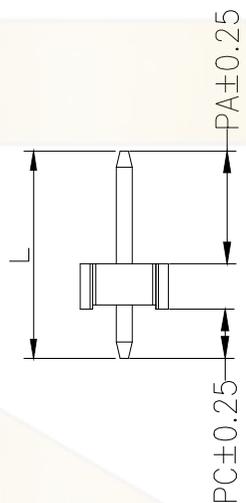
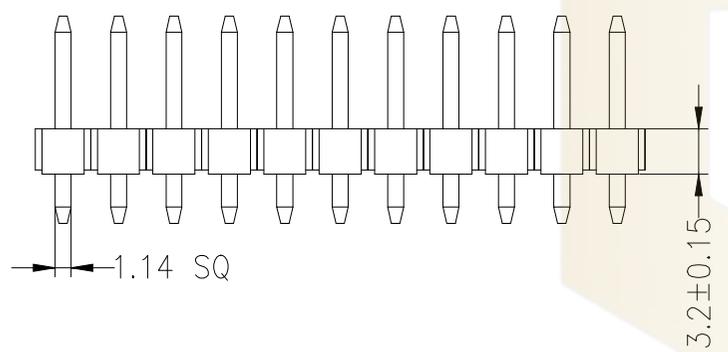
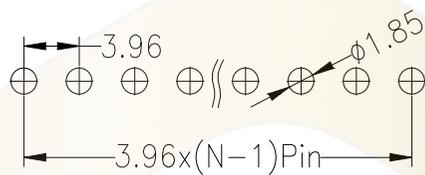


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:5.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: LCP  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 5 seconds)

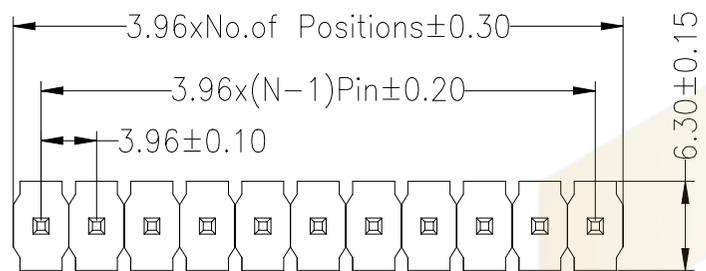

| Dimension antitheses list |      |      |       |
|---------------------------|------|------|-------|
| ITEM                      | PA   | PC   | L     |
| Standard                  | 8.00 | 3.50 | 14.70 |
| Alternate                 |      |      |       |

**Ordering Information**

PZ 396 - \* - N - Z - \* - \*\*

|   |                        |                                      |                  |  |
|---|------------------------|--------------------------------------|------------------|--|
| No. of Rows<br>1=Single Row<br>2=Dual Row | No. of Pins<br>1=20Pin | Type<br>Z=直针<br>N=弯针<br>S=立脚<br>H=插脚 | Length<br>(产品长度) | Contact Plating<br>G0:Gold Flash<br>G1:1u" Gold<br>G2:3u" Gold<br>G3:5u" Gold<br>G4:10u" Gold<br>G5:15u" Gold<br>G6:30u" Gold<br>S0:Gold Flash/Tin<br>S1:Tin |
|---|------------------------|--------------------------------------|------------------|--|

|           |                        |                   | GENE RL TOLERANCE | 制 图<br>DRAWING    | 深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO.,LTD |                           |              |     |
|-----------|------------------------|-------------------|-------------------|-------------------|--|---------------------------|--------------|-----|
|           |                        |                   | DIM TOL           | 审 核<br>CHECK      | 产品名称<br>TITLE  | 3.96单排 排针 直针(塑高3.2)       | 版 本<br>REV.  | A   |
|           |                        |                   | X. X ± 0.30       | 批 准<br>APPROVAL   | 产品料号<br>PART NO.   | PZ396-1-N-Z-3.2-XX(L14.7) | 单 位<br>UNITS | mm  |
| 1         | 初版发行                   |                   | X. XX ± 0.20      | 比 例<br>SCALE      | 材 料<br>MATERIAL  |                           | 页 次<br>SHEET | 1/1 |
| 序号<br>No. | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE | X. XXX ± 0.10     | 投 影<br>Projection |  |                           |              |     |
|           |                        |                   | Angle ± 3.0°      |                   |  |                           |              |     |