

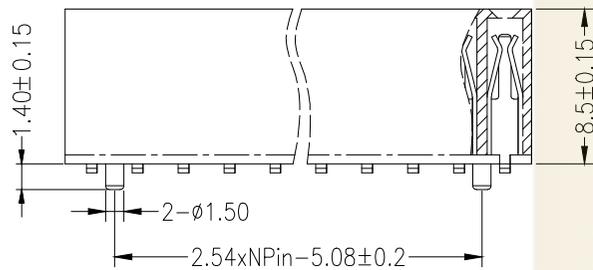
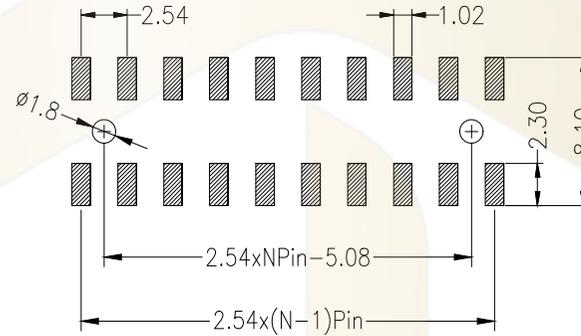



Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS  
 Rated Current:3.0AMP  
 Contact Resistance:20mΩMax  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩMin  
 Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

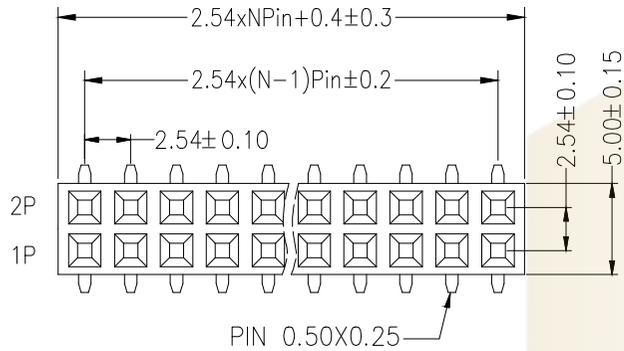

P=With Post



默认 =W/O Post

**Ordering Information**

PM 254		*	-	N	-	S	-	*	-	**	-	P
No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2-40Pin	Type 2-直针 8-弯针 5-半轴 9S-引脚	Length (Pitch) (mm)	Contact G0:Gold C1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Plating Flash	Post (带柱)						

			GENERAL TOLERANCE		制图 DRAWING		 深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK					
			X.X	±0.30	批准 APPROVAL		产品名称 TITLE	2.54双排 排母 贴片(塑高8.5)	版本 REV.	A
1			初版发行		比例 SCALE		产品料号 PART NO.	PM254-2-N-S-8.5-XX(L9.1)	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°		投影 Projection		材料 MATERIAL		页次 SHEET	1/1