
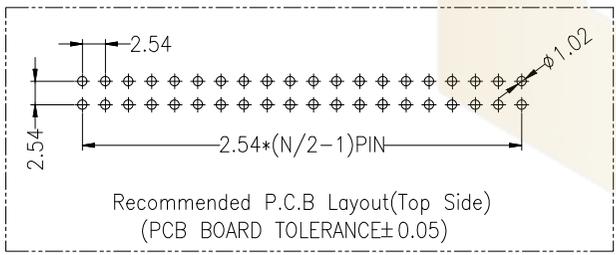


SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩMax
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩMin
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C , 10s(PBT insulator)
 260°C±5°C , 10s(PA6T&PA9T&LCP insulator)

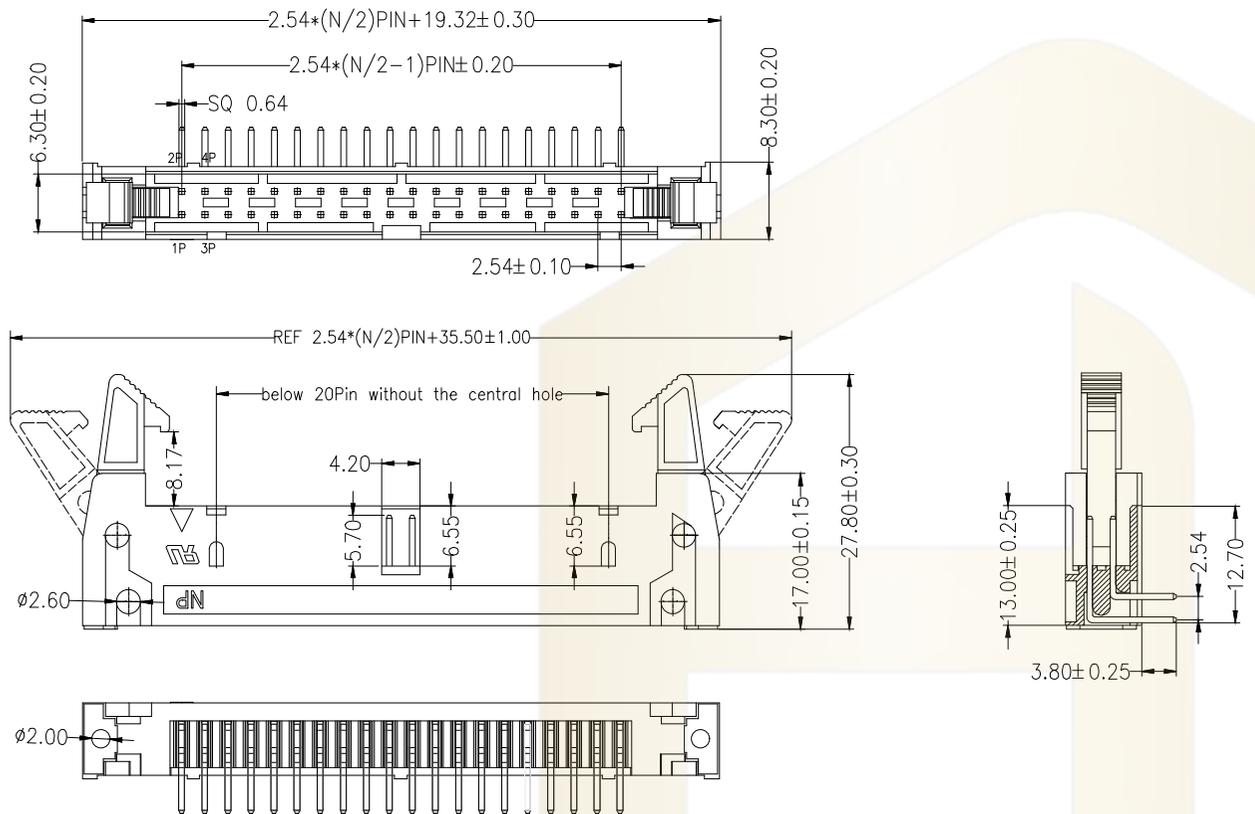

Ordering Information

HC-NJ 254 - * - N - * - * - * - * - *

No. of Rows 2= Dual Row	No. of Pins 6-64Pin	Type 2=111 3=112 5=113	Length (Plastic) (mm)	Contact G0:Gold G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold S1:Tin	Plating F=Flash G=Gold T=Tin	Color B=Black G=Grey	Latch Type L=Long Latch S=Short Latch N= Without Latch
----------------------------	------------------------	---------------------------------	--------------------------	--	---------------------------------------	----------------------------	---

			GENEAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	2.54 牛角 弯针 (长耳扣)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	HC-NJ254-2-N-W-27.8-XX-X-L	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					