
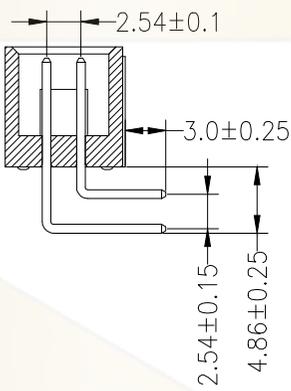


SPECIFICATIONS
 Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

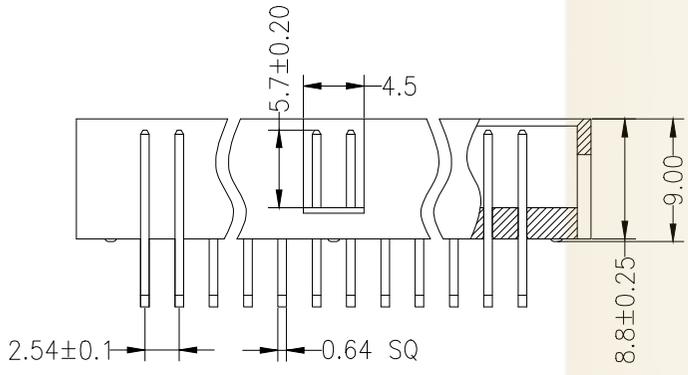

Ordering Information

HC-JN 254 - * - N - * - * * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 06-64Pin	Type 2=直针 3=弯针 4=空针 5=空针	Length (Plastic) (塑高)	Material 默认为PBT C=PA6T E=PA9T F=LCP	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
---	-------------------------	--------------------------------------	-----------------------------	---	--

		GENERAL TOLERANCE		制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
		DIM	TOL	审核 CHECK				
		X.X	±0.30	批准 APPROVAL	产品名称 TITLE	筒牛2.54 双排 弯针	版本 REV.	A
		X.XX	±0.20	比例 SCALE	产品料号 PART NO.	HC-JN254-2-N-W-8.8-XX	单位 UNITS	mm
1	初版发行		X.XXX ±0.10	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					