
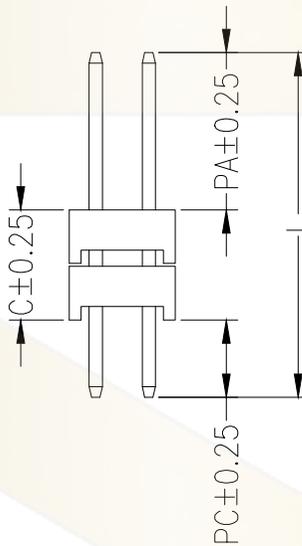
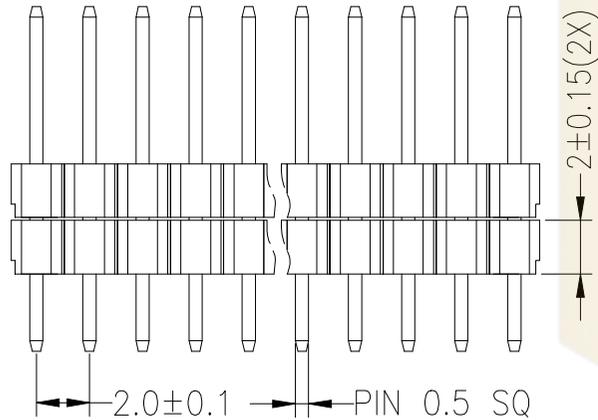
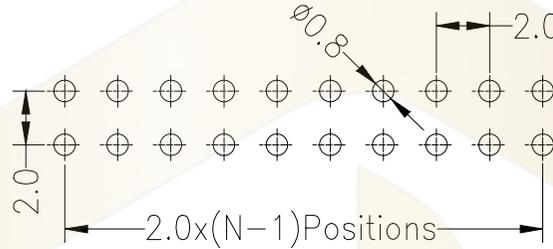


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS  
 Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

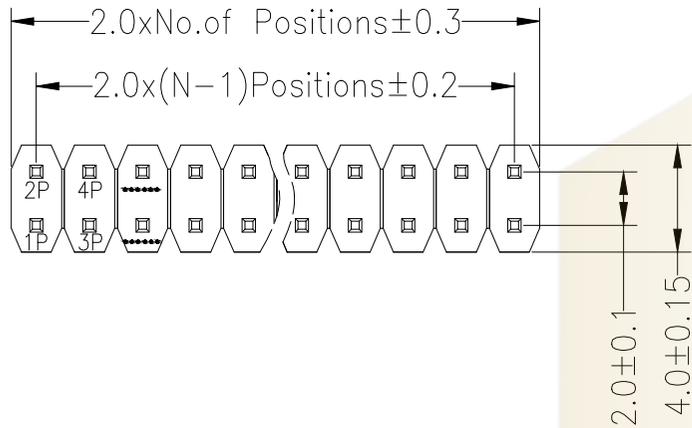

| Dimension antitheses list |      |      |      |       |
|---------------------------|------|------|------|-------|
| ITEM                      | PA   | PC   | C    | L     |
| Standard                  | 3.90 | 2.80 | 4.20 | 10.90 |
| Alternate                 |      |      |      |       |

**Ordering Information**

PZ 200 - \* - N - \* - \* - \*\* - DP

|   |                         |                                       |                |  |                        |
|---|-------------------------|---------------------------------------|----------------|--|------------------------|
| No. of Rows<br>1=Single Row<br>2=Dual Row | No. of Pins<br>02-40Pin | Type<br>Z=直针<br>W=弯针<br>S=立脚<br>WS=接插 | Length<br>(整高) | Contact Plating<br>G0:Gold Flash<br>G1:1u" Gold<br>G2:3u" Gold<br>G3:5u" Gold<br>G4:10u" Gold<br>G5:15u" Gold<br>G6:30u" Gold<br>S0:Gold Flash/Tin<br>S1:Tin | Double Plastic<br>(双塑) |
|---|-------------------------|---------------------------------------|----------------|--|------------------------|

|           |                        |                   | GENEAL TOLERANCE | 制图<br>DRAWING    | 深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO.,LTD |                               |             |     |
|-----------|------------------------|-------------------|------------------|------------------|--|-------------------------------|-------------|-----|
|           |                        |                   | DIM TOL          | 审核<br>CHECK      | 产品名称<br>TITLE  | 2.00双排 双塑 直排针                 | 版本<br>REV.  | A   |
|           |                        |                   | X.X ±0.30        | 批准<br>APPROVAL   | 产品料号<br>PART NO.   | PZ200-2-N-Z-C4.2-XX-DP(L10.9) | 单位<br>UNITS | mm  |
| 1         | 初版发行                   |                   | X.XX ±0.20       | 比例<br>SCALE      | 材料<br>MATERIAL   |                               | 页次<br>SHEET | 1/1 |
| 序号<br>No. | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE | X.XXX ±0.10      | 投影<br>Projection |  |                               |             |     |
|           |                        |                   | Angle ±3.0°      |                  |  |                               |             |     |