

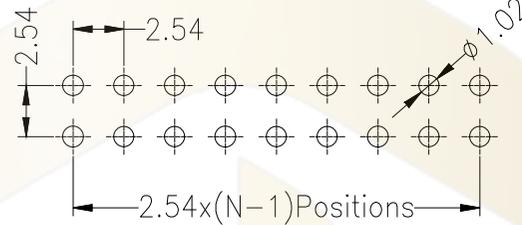


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

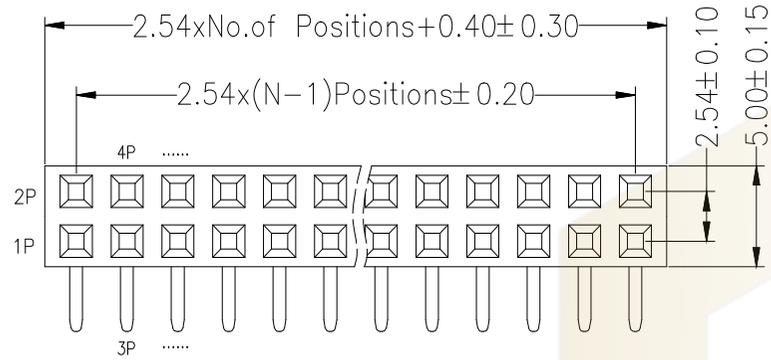


SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 260°C±5°C 5S

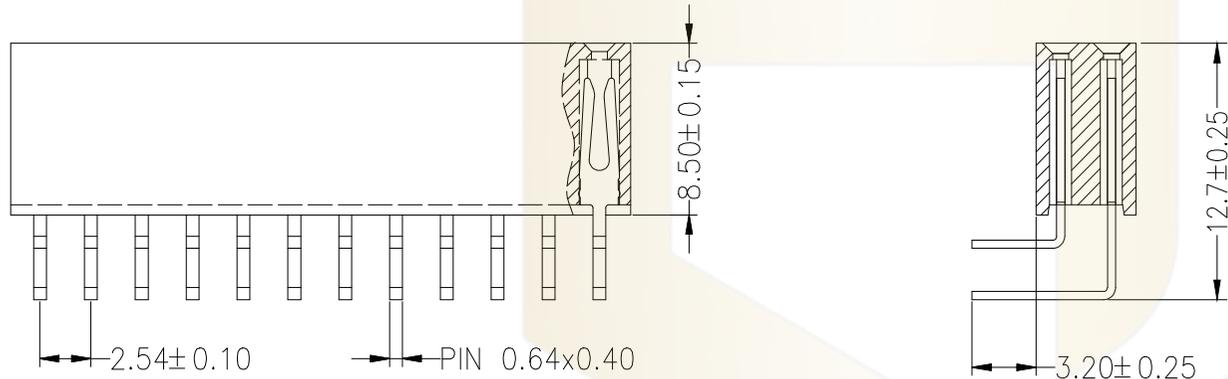

Ordering Information

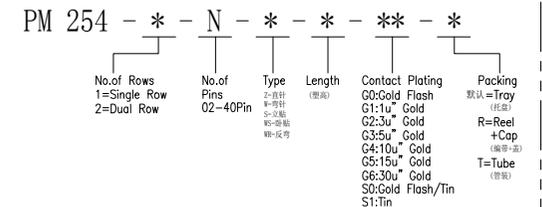

| | | | | | | | | |
|-----------|------------------------|-------------------|-------------|------------------|--|---------------------------|-------------|-----|
| | | GENERAL TOLERANCE | | 制图 DRAWING |  深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD | | | |
| | | DIM | TOL | 审核 CHECK | | | | |
| | | X.X | ±0.30 | 批准 APPROVAL | 产品名称 TITLE | 2.54双排 排母 正弯(塑高8.5) | 版本 REV. | A |
| 1 | | 初版发行 | | 比例 SCALE | 产品料号 PART NO. | PM254-2-N-W-8.5-XX(L12.7) | 单位 UNITS | mm |
| 序号 No. | 变更内容 MODIFY CONTENT | 日期 MODIFY DATE | Angle ±3.0° | 投影 Projection | 材料 MATERIAL | | 页次 SHEET | 1/1 |