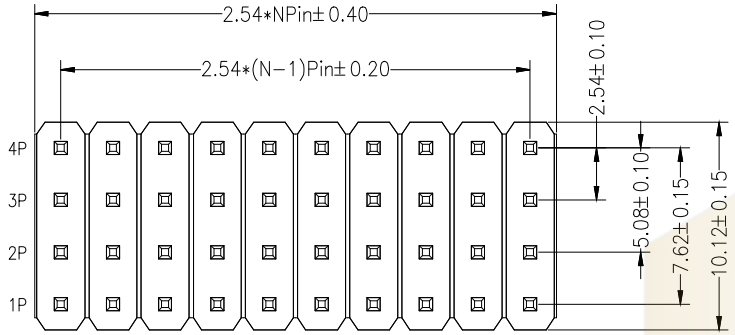

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

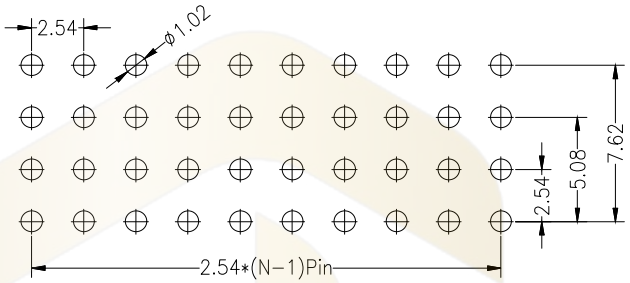

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Max.Processing Temp:
(PBT)245°C±5°C For 5~10 Second
(PA6T/LCP/PA9T)260°C±5°C For 5~10 Second

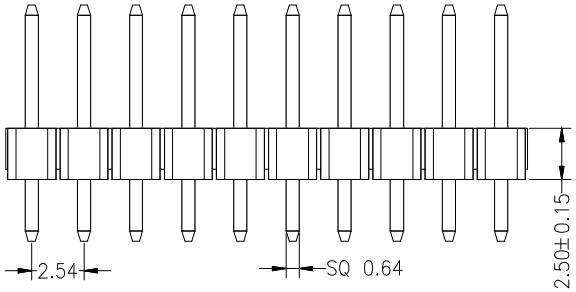

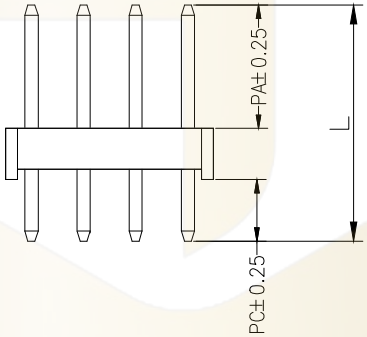

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			

Ordering Information

PZ 254 - * - N - Z - * - **

- No.of Rows: 1=Single Row; 2=Dual Row; 3=Triple Row; 4=Quadruple Row
- No.of Pins: 2-40Pin
- Type: Z=直针; W=弯针; S=立贴; WS=侧贴
- Length (塑高)
- Contact Plating: G0:Gold Flash; G1:1u" Gold; G2:3u" Gold; G3:5u" Gold; G4:10u" Gold; G5:15u" Gold; G6:30u" Gold; S0:Gold Flash/Tin; S1:Tin

深圳市华灿天禄电子有限公司
工程专用章

序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE	
DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

制图 DRAWING	
审核 CHECK	
批准 APPROVAL	
比例 SCALE	
投影 Projection	

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	2.54 四排 直排针(塑高2.5)	版本 REV.	A
产品料号 PART NO.	PZ254-4-N-Z-2.5-XX-FP(L11.5)	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1