
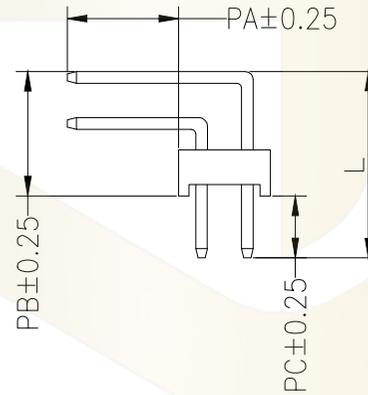
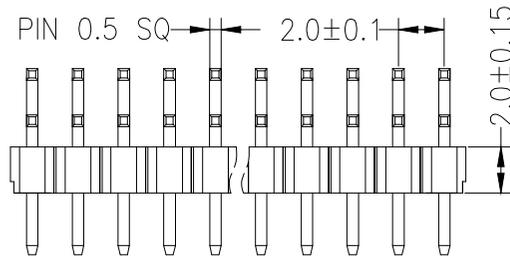
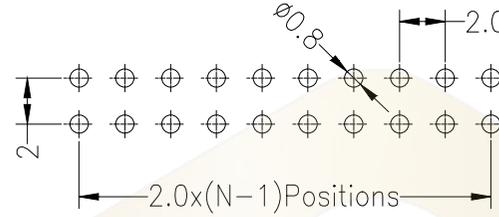


Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE  $\pm 0.05$ )

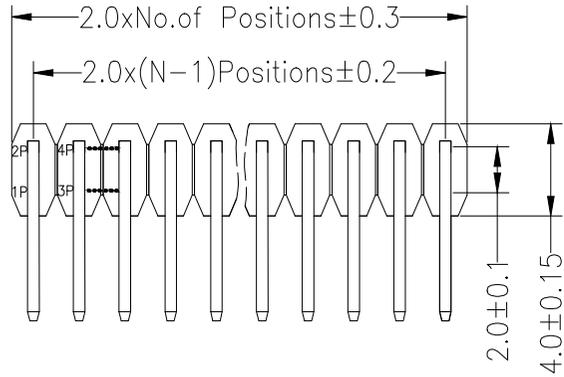

SPECIFICATIONS

Rated Current: 1.5AMP  
Contact Resistance: 20mΩ Max  
Withstand Voltage: 500V AC/DC  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -40°C to +105°C

Contact Material: Brass  
Contact Plating: Au or Sn Over Ni  
Insulator Material: Polyester (UL94V-0)  
Standard: PA6T  
Max. Processing Temp: 230°C for 30-60 seconds  
(260°C for 5 seconds)

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	4.00	5.40	2.80	10.20
Alternate				

**Ordering Information**

PZ 200 - \* - N - \* - \* - \*\*

No. of Rows  
1=Single Row  
2=Dual Row

No. of Pins  
2-40Pin

Type  
2-直插  
3-弯插  
4-弯插  
5-弯插

Length  
(塑高)

Contact Plating  
G0: Gold Flash  
G1: 1u" Gold  
G2: 3u" Gold  
G3: 5u" Gold  
G4: 10u" Gold  
G5: 15u" Gold  
G6: 30u" Gold  
S0: Gold Flash/Tin  
S1: Tin

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK		产品名称 TITLE	2.00双排 排针 反弯(塑高2.0)	版本 REV.	A
			X.X	$\pm 0.30$	批准 APPROVAL		产品料号 PART NO.	PZ200-2-N-WR-2.0-XX(L10.2)	单位 UNITS	mm
1	初版发行		X.XX	$\pm 0.20$	比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX	$\pm 0.10$	投影 Projection					
			Angle	$\pm 3.0^\circ$						