
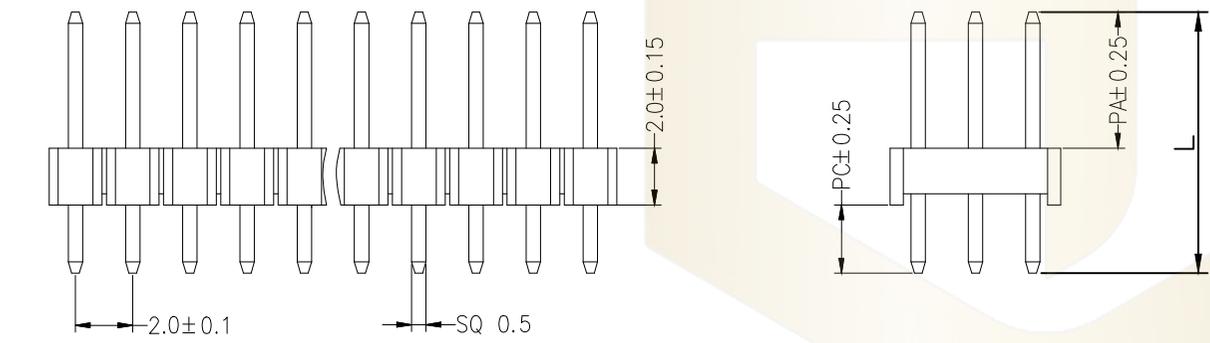


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS  
 Rated Current:3.0AMP  
 Contact Resistance:20mΩMax  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩMin  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL 4V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

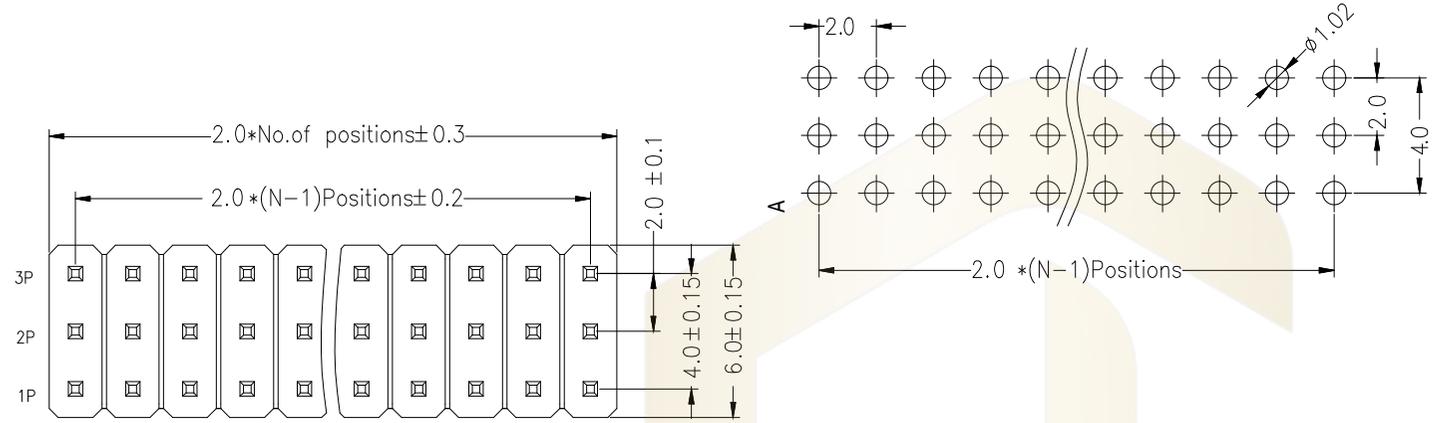

Dimension antitheses list			
ITEM	PA	PC	L
Standard	3.90	2.80	8.70
Alternate			

**Ordering Information**

PZ 200 - \* - N - Z - \* - \*\*

No. of Rows 1=Single Row 2=Dual Row 3=Triple Row	No. of Pins 2-40Pin	Type 2-直插 3-弯插 5-穿板 95-穿板	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
---	------------------------	---------------------------------------	------------------	--

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	2.0三排 直插针(塑高2.0)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	PZ200-3-N-Z-2.0-XX(L8.7)	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection				
			Angle ±3.0°					
1	初版发行							
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						