

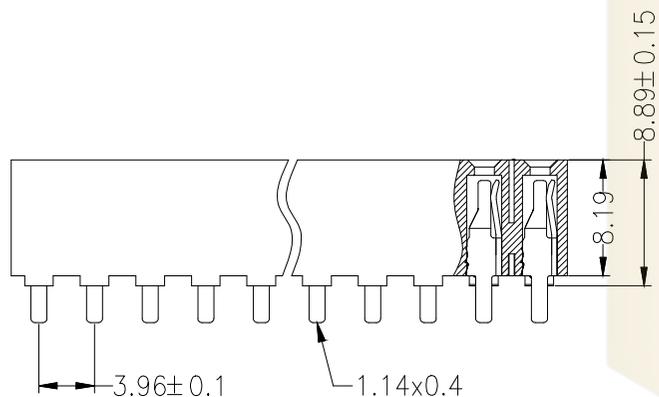
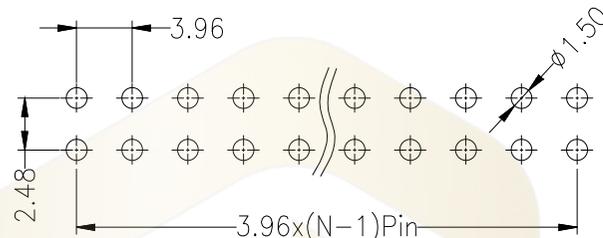


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

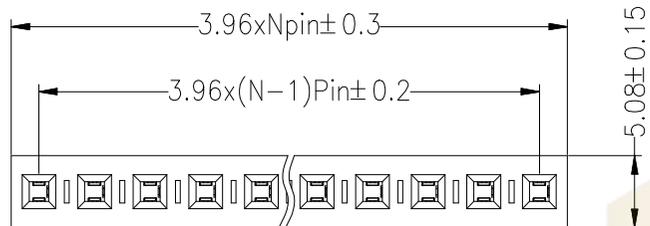

SPECIFICATIONS
Rated Current:7.0AMP
Contact Resistance:20mΩMax
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

PM 396 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-20Pin

Type
Z-直针
D-弯针
S-直插
W-插脚

Length
(Plastic)
(塑高)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
SD:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK						
			X. X	±0.30	批 准 APPROVAL		产品名称 TITLE		3.96单排 排母 直针(塑高8.89)	版本 REV.	A
			X. XX	±0.20	比 例 SCALE		产品料号 PART NO.		PM396-1-N-Z-8.89-XX(L11.49)	单 位 UNITS	mm
			X. XXX	±0.10	投 影 Projection		材 料 MATERIAL			页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°								