
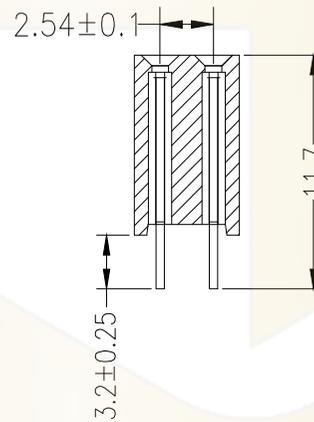
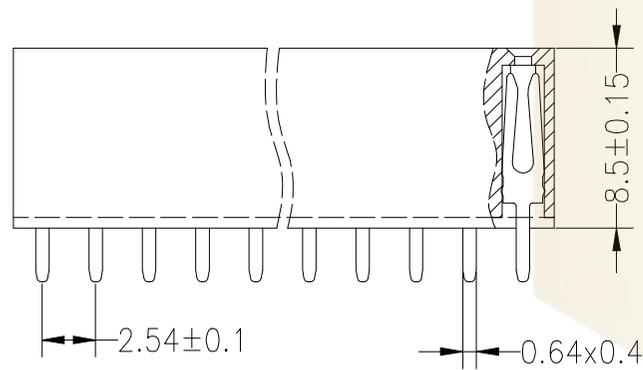
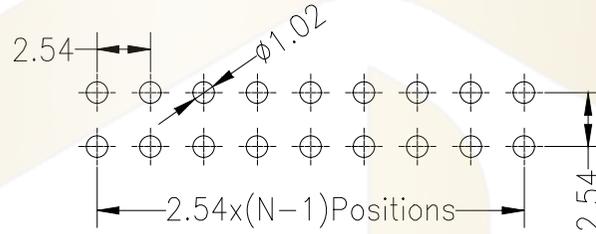


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS
 Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 260°C±5°C 5S

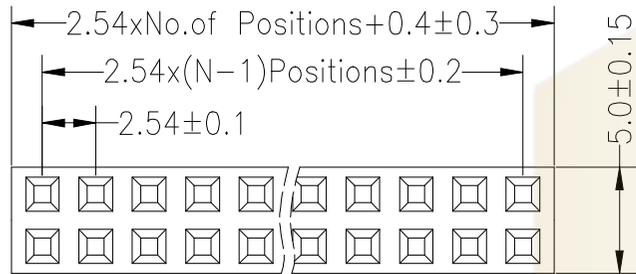

Ordering Information

PM 254 - * - N - * - * - ** - *

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02-40Pin	Type 2=直针 3=弯针 4=直插 5=贴片 6=带帽	Length (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Packing 默认=Tray (托盘) R=Reel +Cap (带帽) T=Tube (管装)
---	-------------------------	--	----------------	--	--

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD					
			DIM TOL	审核 CHECK			产品名称 TITLE	2.54双排 排母 直针(塑高8.5)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL			产品料号 PART NO.	PM254-2-N-Z-8.5-XX(L11.7)	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE			材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°							