

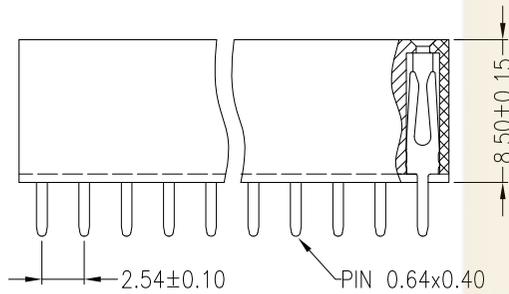
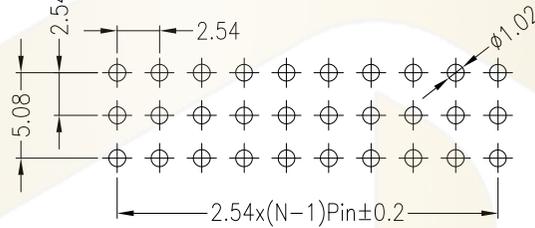


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

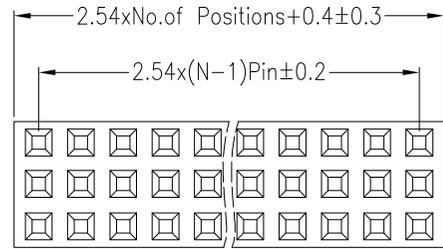

SPECIFICATIONS

Rated Current: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Copper Alloy
Contact Plating: Au Or Sn Over Ni
Insulator Material: Polyester(UL94V-0)
Resistance To Soldering Heat:
245°C±5°C, 10s(PBT insulator)
260°C±5°C, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

PM 254 - * - N - W - * - **

No. of Rows 1=Single Row 2=Dual Row 3=Three Row	No. of Pins 2-40Pin	Type 塑料 树脂 陶瓷	Length (Plastic) (单位)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	------------------------	------------------------	-----------------------------	--

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	2.54三排 排母 直针 塑高8.5	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	PM254-3-N-Z-8.5-XX(L11.70)	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection				
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°					