
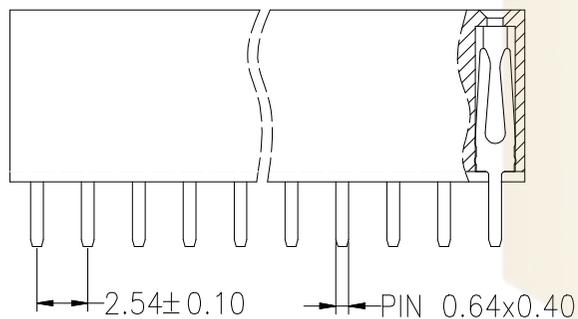


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

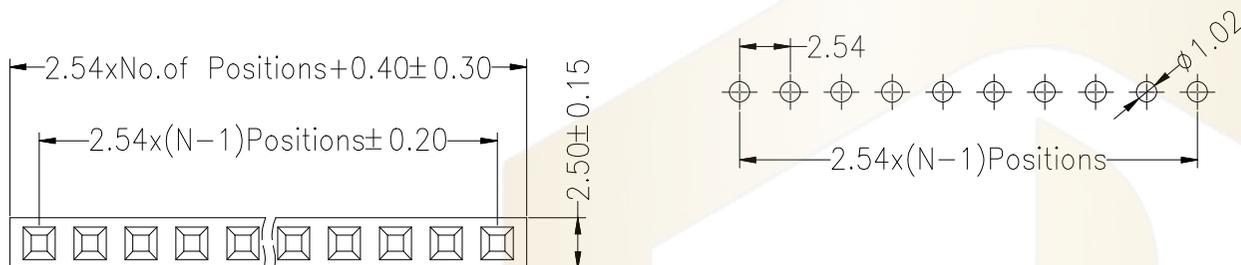


SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩMax
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 260°C±5°C 5S

Ordering Information

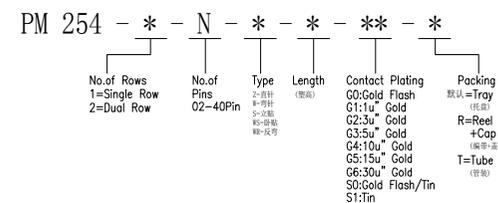

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK				
			X.X ±0.30	批准 APPROVAL	产品名称 TITLE	2.54 单排 排母 直针 塑高8.5	版本 REV.	A
			X.XX ±0.20	比例 SCALE	产品料号 PART NO.	PM254-1-N-Z-8.5-XX	单位 UNITS	mm
			X.XXX ±0.10	投影 Projection	材料 MATERIAL			
1	初版发行		Angle ±3.0°					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE			页次 SHEET			
					1/1			