
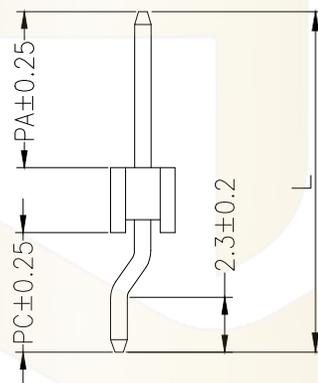
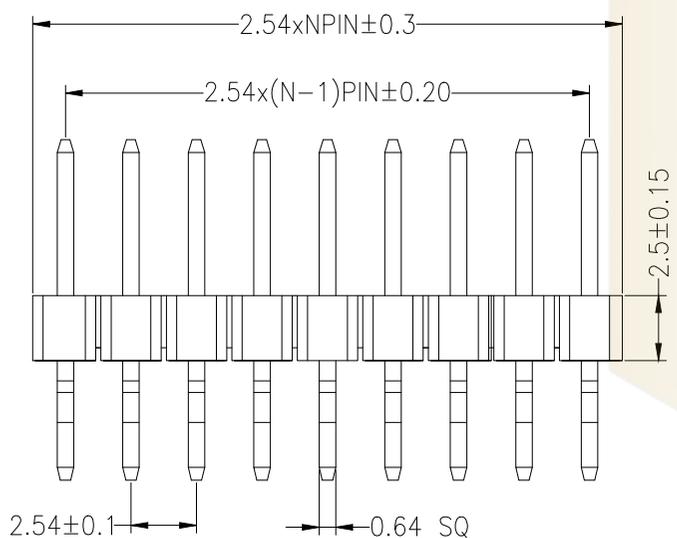
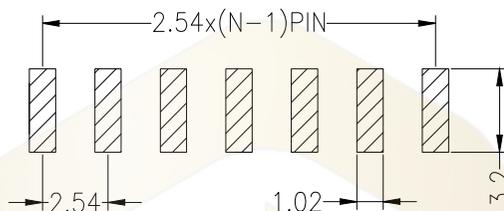


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

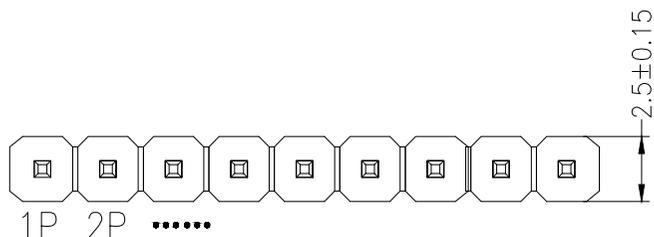

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	4.80	13.30
Alternate			

Ordering Information

PZ 254 - * - N - WS - * - **

No.of Rows 1=Single Row 2=Dual Row	No.of Pins 2-40Pin	Type 直插型 贴片型 插-插型	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
--	-----------------------	----------------------------	------------------	--

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK		产品名称 TITLE		版本 REV.	A
			X. X	±0.30	批 准 APPROVAL		2.54单排 卧贴 排针(塑高2.5)			
1			X. XX	±0.20	比 例 SCALE		产品料号 PART NO.		单 位 UNITS	mm
序号 No.			X. XXX	±0.10	投 影 Projection		材料 MATERIAL		页 次 SHEET	1/1
变更内容 MODIFY CONTENT			日期 MODIFY DATE	Angle	±3.0°					