

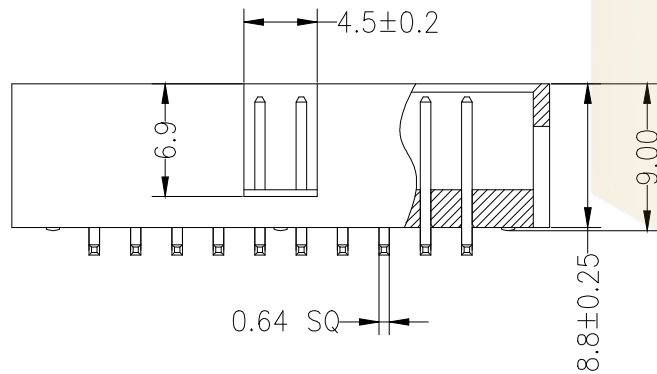
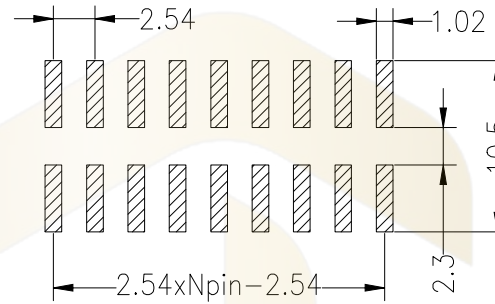


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

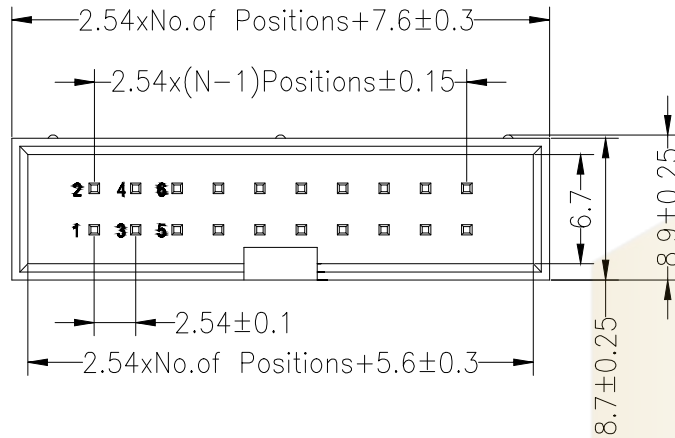

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Ordering Information

HC-JN 254 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2=40Pin

Type
2=直插
8=弯插
S=贴片
W=带插

Length
(Plastic)
(mm)

Contact Plating
G0:Gold Flash
G1:1u" Gold
G2:3u" Gold
G3:5u" Gold
G4:10u" Gold
G5:15u" Gold
G6:30u" Gold
S0:Gold Flash/Tin
S1:Tin

			GENERAL TOLERANCE	制 图		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD		
			DIM TOL	DRAWING				
			X. X ±0.30	审 核		产品名称	筒牛2.54 双排 贴片	版 本
			X. XX ±0.20	CHECK		TITLE		REV.
			X. XXX ±0.10	批 准		产品料号	HC-JN254-2-N-S-8.8-XX	单 位
			Angle ±3.0°	APPROVAL		PART NO.		UNITS
1	初版发行			比 例		材料		页 次
序号	变更内容	日期		SCALE		MATERIAL		SHEET
No.	MODIFY CONTENT	MODIFY DATE		Angle	投影			1/1
				±3.0°	Projection			