

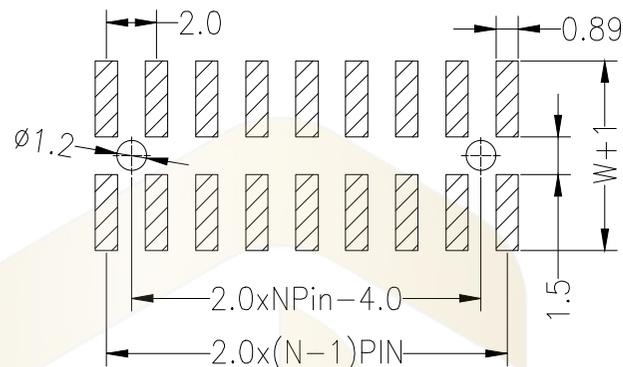
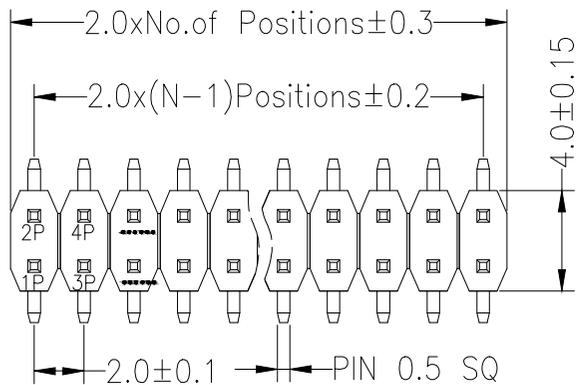


Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

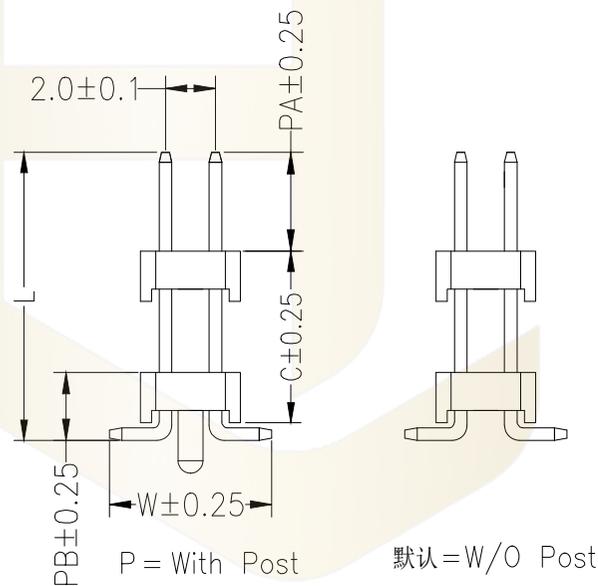

**SPECIFICATIONS**  
 Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

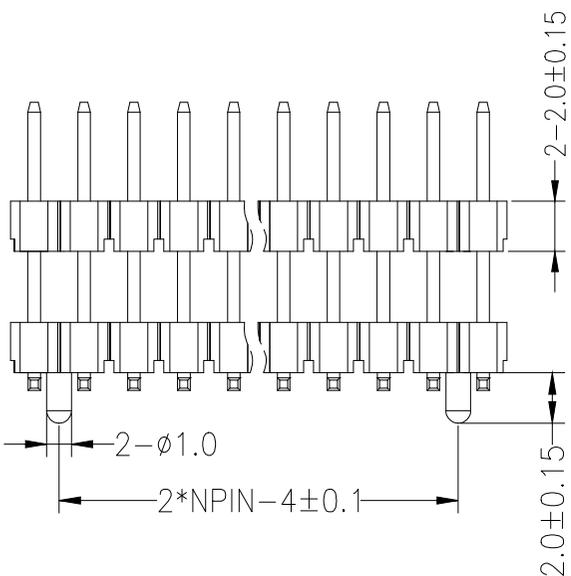

P = With Post

默认=W/O Post

Dimension antitheses list

ITEM	PA	PB	W	C	L
Standard	3.80	2.50	6.50	6.00	10.30
Alternate					

**Ordering Information**

PZ 200 - \* - N - S - C\* - \*\* - P

No.of Rows  
1=Single Row  
2=Dual Row

No.of Pins  
2-40Pin

Type  
S=直插  
D=贴片  
S=直插

Length  
(mm)

Contact Plating  
G0:Gold Flash  
G1:1u" Gold  
G2:3u" Gold  
G3:5u" Gold  
G4:10u" Gold  
G5:15u" Gold  
G6:30u" Gold  
S0:Gold Flash/Tin  
S1:Tin

Post  
(mm)

			GENERAL TOLERANCE	制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审核 CHECK	产品名称 TITLE	2.00 双排双塑 排针 贴片	版本 REV.	A
			X.X ±0.30	批准 APPROVAL	产品料号 PART NO.	PZ200-2-N-S-C6.0-XX(L10.3)	单位 UNITS	mm
1	初版发行		X.XX ±0.20	比例 SCALE	材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX ±0.10	投影 Projection				
			Angle ±3.0°					