

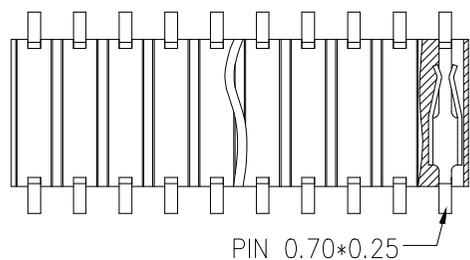
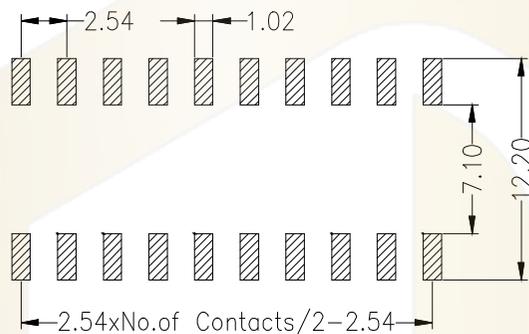


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

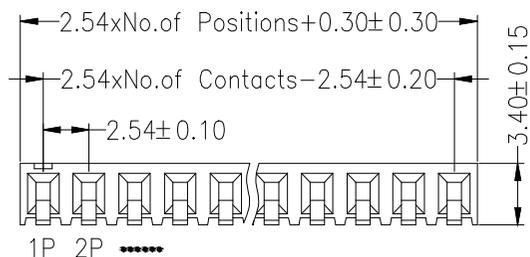

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
265° C±5° C, 10s(PA6T&PA9T&LCP insulator)

Ordering Information

PM 254 - * - N - SE - * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 02-40Pin	Type Z-直插 F-弯插 S-直插 WS-弯插 WC-板贴脚 SD-双侧贴片 SZ-双侧插板	Length (Plastic) (英寸)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold
---	-------------------------	---	-----------------------------	---

		GENERL TOLERANCE		制图 DRAWING	 深圳市华灿天禄电子有限公司 ShenzhenhuaciantianluELECTRONICS CO., LTD			
		DIM	TOL	审核 CHECK				
		X.X	±0.30	批准 APPROVAL	产品名称 TITLE	2.54单排 双侧贴片 排母 塑高8.1	版本 REV.	A
1	初版发行	X.XX	±0.20	比例 SCALE	产品料号 PART NO.	PM254-1-N-SE-8.1-XX(L11.1)	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投影 Projection	材料 MATERIAL		页次 SHEET	1/1