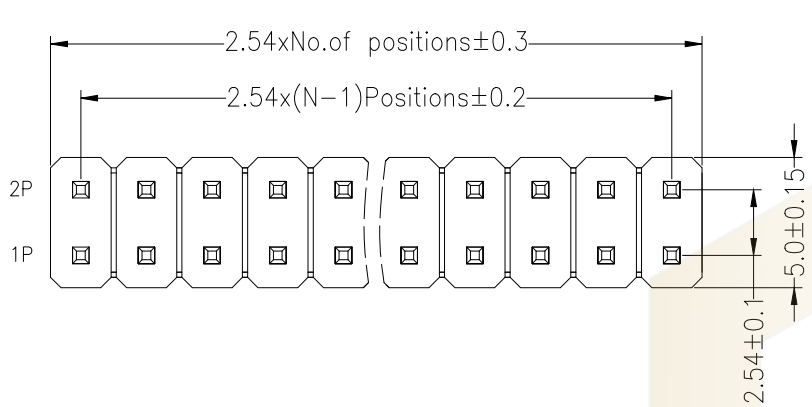

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

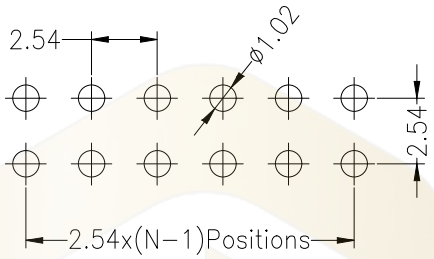

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

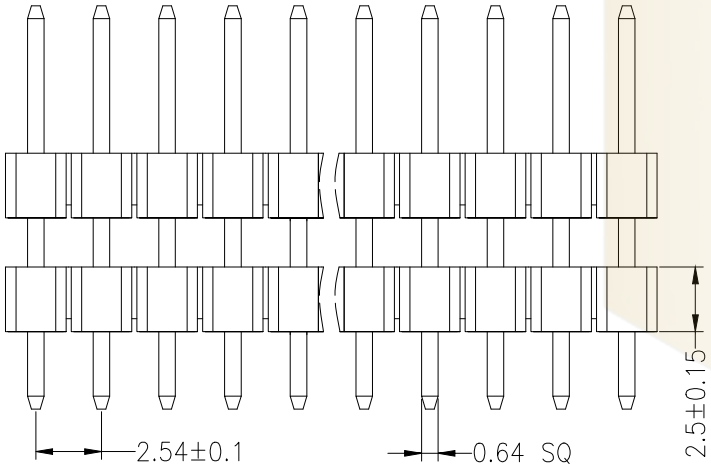

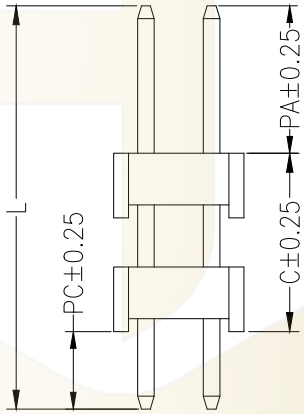

Dimension antitheses list				
ITEM	PA	PC	C	L
Standard	6.00	3.00	10.00	19.00
Alternate				

Ordering Information

PZ 254 - * - N - Z - C* - ** - DP

- * : No.of Rows 1=Single Row 2=Dual Row
- N : No.of Pins 2-40Pin
- Z : Type Z-直针 W-弯针 S-立贴 WS-侧贴
- C* : (双塑间距)
- ** : Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
- DP : Dual Plastic (双塑)

深圳市华灿天禄电子有限公司 工程专用章

序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE	
DIM	TOL
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3.0°

制图 DRAWING	
审核 CHECK	
批准 APPROVAL	
比例 SCALE	
投影 Projection	

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	2.54 双排 直排针 双塑	版本 REV.	A
产品料号 PART NO.	PZ254-2-N-Z-C10-XX-DP(L19.0)	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1