


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS
Rated Current:5.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: LCP
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

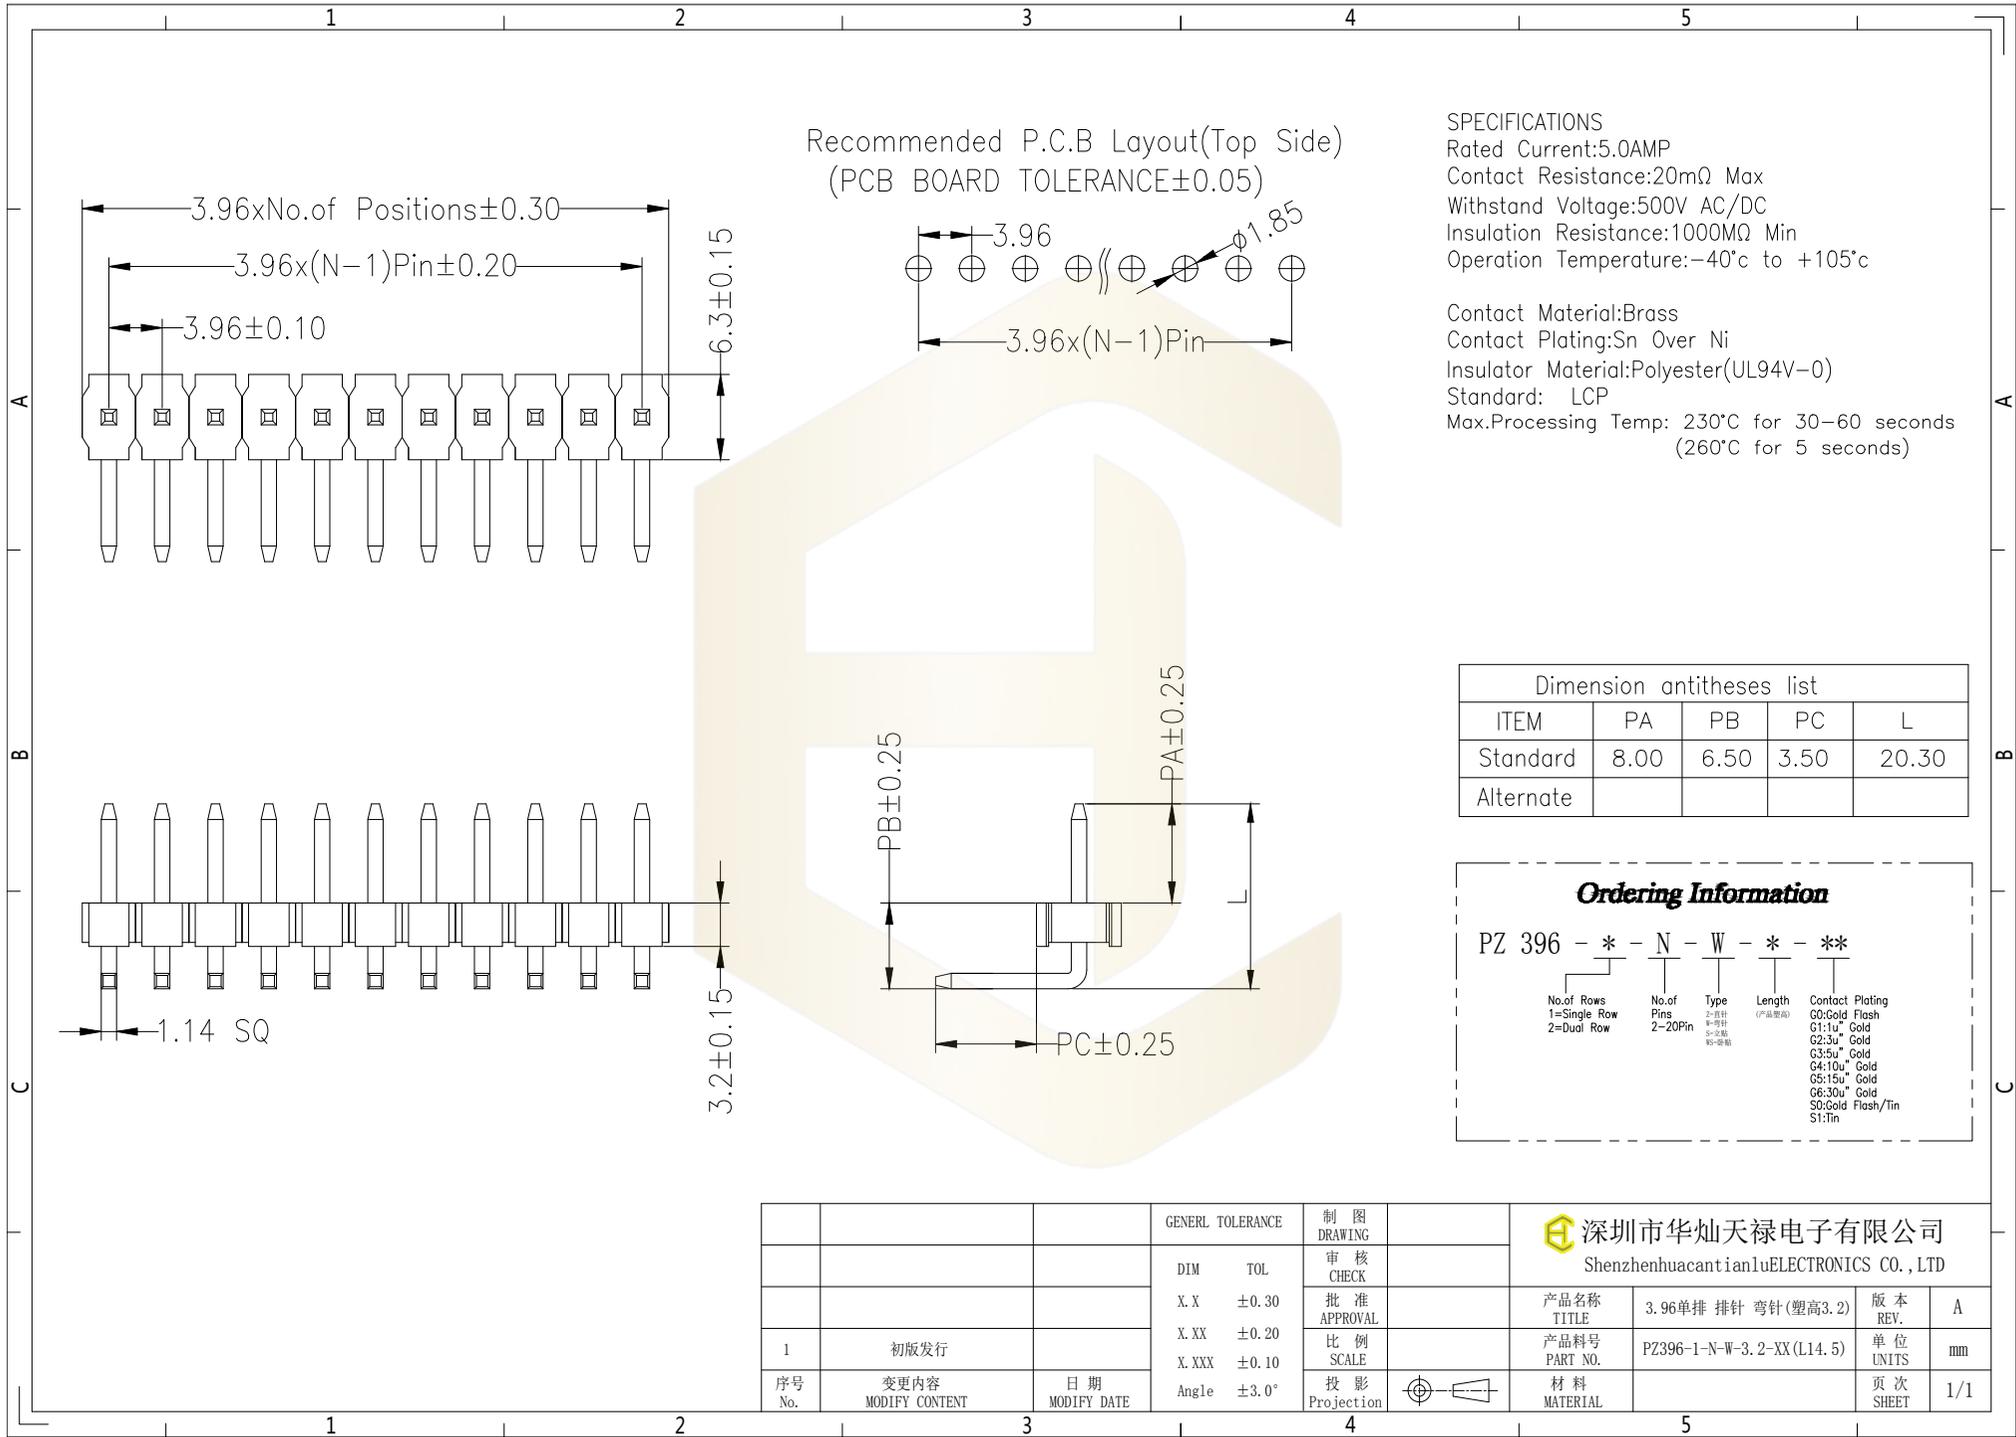

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	8.00	6.50	3.50	20.30
Alternate				

Ordering Information

PZ 396 - * - N - W - * - **

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2=20Pin	Type 2=弯针 S=直插 W=带脚	Length (产品长度)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
-------------------------------------------	------------------------	------------------------------	------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD				
			DIM	TOL	审 核 CHECK		产品名称 TITLE		3.96单排 排针 弯针(塑高3.2)	版本 REV.	A
			X.X	±0.30	批 准 APPROVAL		产品料号 PART NO.		PZ396-1-N-W-3.2-XX(L14.5)	单 位 UNITS	mm
1			初版发行		比 例 SCALE		材 料			页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投 影 Projection		材料 MATERIAL				