
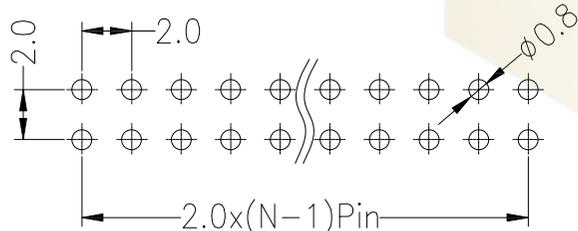


SPECIFICATIONS  
 Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 400V AC/DC  
 Insulation Resistance: 800MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

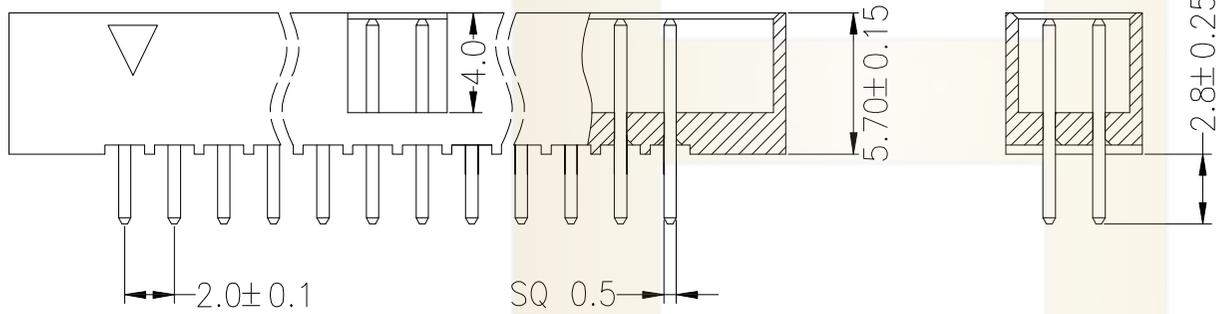

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

**Ordering Information**

HC-JN 200 - \* - N - Z - \* - \*\*

No. of Rows 1=Single Row 2=Dual Row	No. of Pins 2-40Pin	Type Z=塑料 S=0.5 V=0.75	Length (Plastic) (明高)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin
---	------------------------	---------------------------------	-----------------------------	--

			GENERAL TOLERANCE	制图	深圳市华灿天禄电子有限公司 Shenzhenhuaciantianlu ELECTRONICS CO., LTD			
			DIM TOL	审核				
			X.X ±0.30	批准	产品名称	筒牛2.00 双排 排母 直针	版本	A
			X.XX ±0.20	比例	产品料号	HC-JN200-2-N-Z-5.70-XX	REV.	
			X.XXX ±0.10	SCALE	PART NO.		UNIT	mm
序号	变更内容	日期	Angle ±3.0°	投影	材料		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Projection	MATERIAL		SHEET	