


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)




S=Short Latch L=Long Latch

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩMax
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩMin
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Resistance To Soldering Heat:
260°C±5°C, 10s(PA6T&PA9T insulator)

Ordering Information

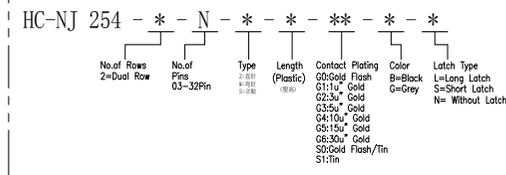

			GENERAL TOLERANCE		制图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核 CHECK					
			X.X	±0.30	批准 APPROVAL		产品名称 TITLE	2.54 牛角 贴片 (长耳扣)	版本 REV.	A
1			初版发行		比例 SCALE		产品料号 PART NO.	HC-NJ254-2-N-S-27.8-XX-X-L	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle	±3.0°	投影 Projection		材料 MATERIAL		页次 SHEET	1/1