

Ass'y High(H)	Plastic High	
	Male (H1)	Female (H2)
1.50	1.14	1.45
2.00	1.14	1.95
2.50	1.14	2.40
3.00	1.14	2.90
3.50	1.14	3.40
4.00	1.14	3.90

NOTES:

MATERIAL:



- HOUSING: LCP . UL 94V-0 NATURE
- CONTACT: PHOSPHOR BRONZE
CONTACT: SEE ORDER INF ORMATION; SOLDER: GOLD FLASH
UNDERPLATING: 50~120u" NICKEL OVERALL

ELECTRICAL:

- CURRENT RATING: 0.3A
- VOLTAGE RATING 30V AC/DC
- CONTACT RESISTANCE: 90m MAX
- INSULATION RESISTANCE: 50MQ MIN

ENVIRONMENTAL:

- OPERATING TEMPERATURE: -55°C TO +125°C

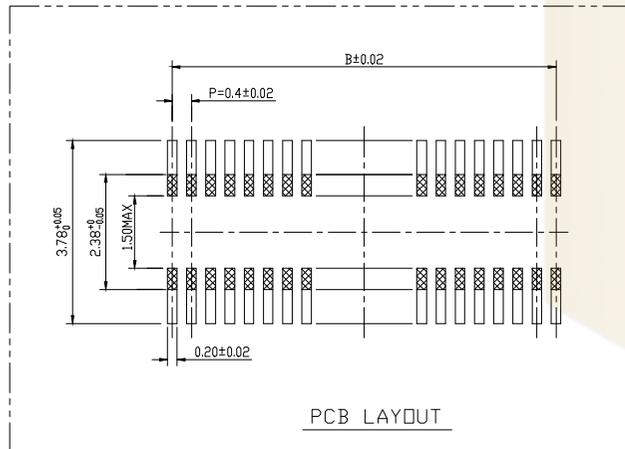

Pin	A	B	C
10	4.6	1.6	1.0
12	5.0	2.0	
16	5.8	2.8	
20	6.6	3.6	
24	7.4	4.4	1.2
30	8.6	5.6	1.5
34	9.4	6.4	2.3
40	10.6	7.6	3.2
50	12.6	9.6	
60	14.6	11.6	
70	16.6	13.6	
80	18.6	15.6	
90	20.6	17.6	
100	22.6	19.6	

Ordering Information

HC-PBB40C - NDS - 0.4V - ** - 06

No. of Pins	Nature	PITCH	High (H)
10-120Pin	DS=Female	0.4V=0.4mm	1.5-1.50mm
10=10Pin			2.0-2.00mm
12=12Pin			2.5-2.50mm
.....			3.0-3.00mm
			3.5-3.50mm
			4.0-4.00mm

		GENEAL TOLERANCE	制图 DRAWING	06	深圳市华灿天禄电子有限公司 ShenzhenhuaciantianluELECTRONICS CO., LTD			
		DIM TOL	审核 CHECK					
		X.X ±0.30	批准 APPROVAL		产品名称 TITLE	0.4 双槽 贴片 母座 (BTB)	版本 REV.	A
		X.XX ±0.20	比例 SCALE		产品料号 PART NO.	HC-PBB40C-NDS-0.4V-XX-06	单位 UNITS	mm
		X.XXX ±0.10	投影 Projection		材料 MATERIAL		页次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						
		Angle ±3.0°						