


3D VIEW

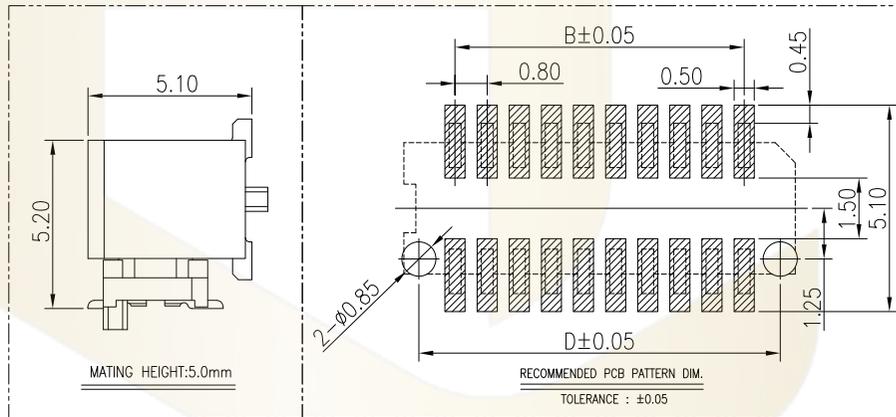

NOTES:

- HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94-0 COLOR:BEIGE.
- TERMINAL: PHOSPHOR BRONZE PLATING: 1 $\mu$ "GOLD FLASH OVERALL 50~100 $\mu$ "NICKEL UNDER PLATED.
- VOLTAGE RATING: 60V AC/DC
- CURRENT RATING: 0.5A MAX AC/DC
- OPERATING TEMPERATURE: -25 $^{\circ}$ C TO +85 $^{\circ}$ C
- CONTACT RESISTANCE: 60m $\Omega$  MAX
- INSULATION RESISTANCE: 800M $\Omega$  MIN

No. of contacts	Dimensions			
	A	B	C	D
4	3.35	0.80	2.35	2.60
6	4.15	1.60	3.15	3.40
8	4.95	2.40	3.95	4.20
10	5.75	3.20	4.75	5.00
12	6.55	4.00	5.55	5.80
14	7.35	4.80	6.35	6.60
16	8.15	5.60	7.15	7.40
18	8.95	6.40	7.95	8.20
20	9.75	7.20	8.75	9.00
22	10.55	8.00	9.55	9.80
24	11.35	8.80	10.35	10.60
26	12.15	9.60	11.15	11.40
28	12.95	10.40	11.95	12.20
30	13.75	11.20	12.75	13.00
32	14.55	12.00	13.55	13.80
34	15.35	12.80	14.35	14.60
36	16.15	13.60	15.15	15.40
38	16.95	14.40	15.95	16.20
40	17.75	15.20	16.75	17.00
42	18.55	16.00	17.55	17.80
44	19.35	16.80	18.35	18.60
46	20.15	17.60	19.15	19.40
48	20.95	18.40	19.95	20.20
50	21.75	19.20	20.75	21.00
52	22.55	20.00	21.55	21.80
60	25.75	23.20	24.75	25.00
70	29.75	27.20	28.75	29.00
80	33.75	31.20	32.75	33.00


Ordering Information

HC-PBB 08 - \* - N - \* - \* - H\* - \*\* - R - P -06

PITCH: C=0.5mm 08=0.8mm  
 1= 单槽 2= 双槽  
 No. of Pins: 04P=04P 08P=08P  
 Nature: M=Male F=Female  
 S=Side Inserted (SIP)  
 Plastic Height: H3.55=3.55mm  
 Contact Plating: G11/2" Gold  
 R=Reel  
 Post


			GENEAL TOLERANCE	制 图	深圳市华灿天禄电子有限公司			
			DIM TOL	DRAWING	ShenzhenhuacantianlueELECTRONICS CO.,LTD			
			X.X ±0.30	审 核	产品名称	BTB 0.8 单槽 公座 立式侧插	版 本	A
			X.XX ±0.20	CHECK	TITLE	座高3.55mm 编带 带柱	REV.	
			X.XXX ±0.10	批 准	产品料号	HC-PBB08-1-N-M-S-IH3.55-XX-R-P-06	单 位	mm
1	初版发行	日期	Angle ±3.0°	APPROVAL	PART NO.		页 次	1/2
序号	变更内容	日期		SCALE	材 料		单 位	
No.	MODIFY CONTENT	MODIFY DATE		投影	MATERIAL		页 次	

Tape width 16 and 24 mm

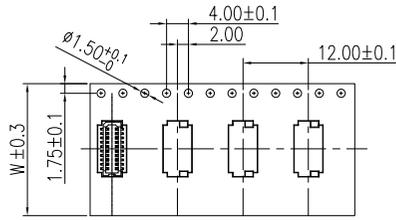

PULL OUT DIRECTION


Tape width 32 and 44 mm

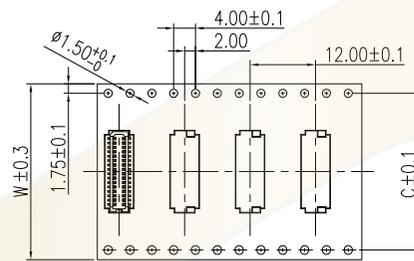


PULL OUT DIRECTION

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance  $\pm 0.20$ .
- 2.Carrier camber is within 1mm in 100mm.
- 3.Material: black conductive polystyrene alloy.
- 4.Material Thickness:  $0.3 \pm 0.05$ mm.
- 5.All dimensions meet EIA-481-B requirements.
- 6.5000pcs Pef Reel.
- 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.  
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

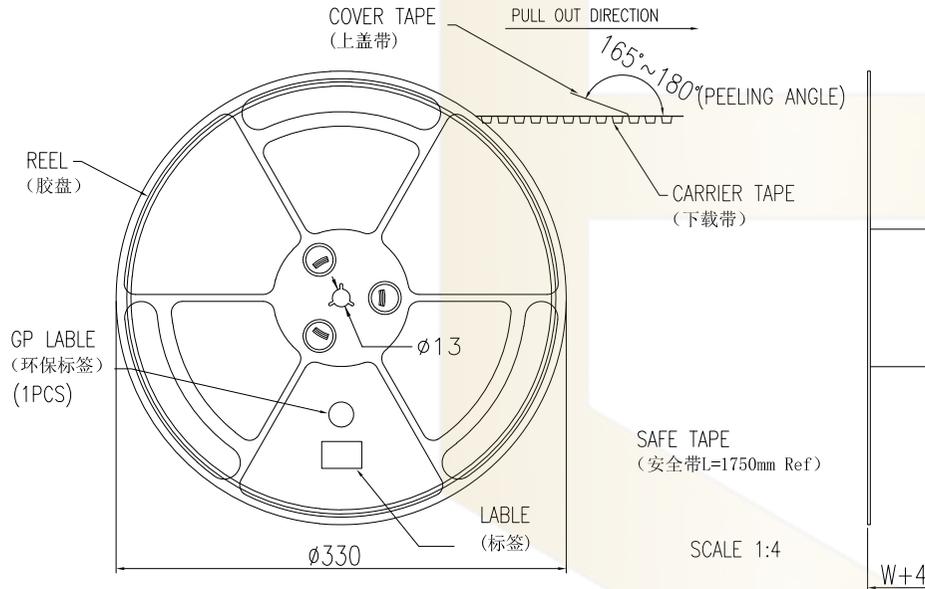

SCALE 1:4

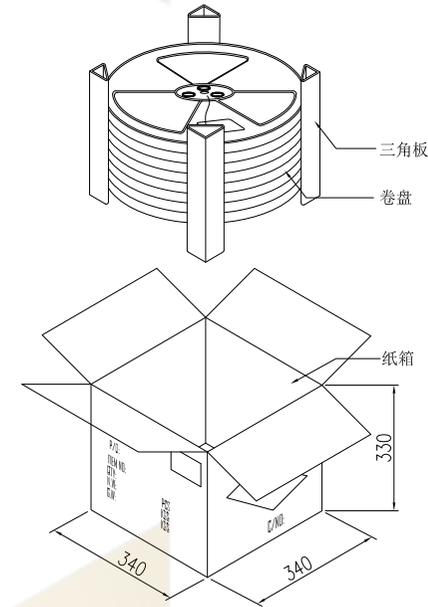

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~20PIN	16	-	1000	12	12000
21PIN~40PIN	24	-	1000	10	10000
41PIN~50PIN	32	28.4	1000	8	8000
51PIN~60PIN	44	40.4	1000	6	6000

GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司			
DIM	TOL	DRAWING	ShenzhenhuacantianluELECTRONICS CO.,LTD			
X.X	$\pm 0.30$	审核	产品名称	BTB 0.8 单槽 公座 立式侧插	版本	A
X.XX	$\pm 0.20$	批准	TITLE	座高3.55mm 编带 带柱-包装图	REV.	
X.XXX	$\pm 0.10$	SCALE	产品料号	HC-PBB08-1-N-M-S-H3.55-XX-R-P-06	单位	mm
Angle	$\pm 3.0^\circ$	投影	PART NO.		UNIT	
		Projection	MATERIAL		页次	2/2

序号	变更内容	日期
No.	MODIFY CONTENT	MODIFY DATE
1	初版发行	