
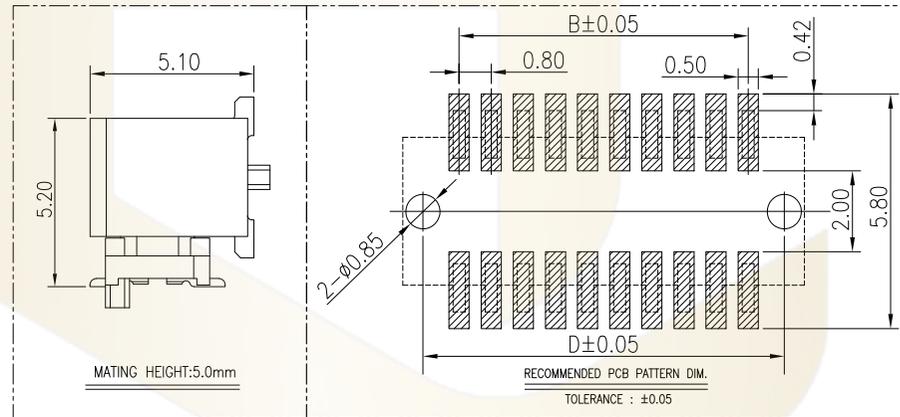


3D VIEW

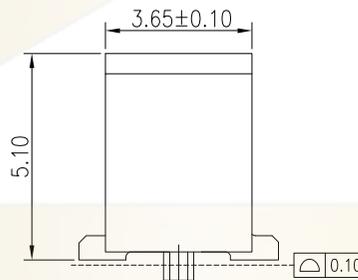

- NOTES:
- HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94-0 COLOR:BEIGE.
 - TERMINAL: PHOSPHOR BRONZE PLATING: 1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
 - VOLTAGE RATING: 60V AC/DC
 - CURRENT RATING: 0.5A MAX AC/DC
 - OPERATING TEMPERATURE: -25°C TO +85°C
 - CONTACT RESISTANCE: 60mΩ MAX
 - INSULATION RESISTANCE: 800MΩ MIN

NO. of contacts	Dimensions			
	A	B	C	D
4	3.60	0.80	2.45	2.60
6	4.40	1.60	3.25	3.40
8	5.20	2.40	4.05	4.20
10	6.00	3.20	4.85	5.00
12	6.80	4.00	5.65	5.80
14	7.60	4.80	6.45	6.60
16	8.40	5.60	7.25	7.40
18	9.20	6.40	8.05	8.20
20	10.00	7.20	8.85	9.00
22	10.80	8.00	9.65	9.80
24	11.60	8.80	10.45	10.60
26	12.40	9.60	11.25	11.40
28	13.20	10.40	12.05	12.20
30	14.00	11.20	12.85	13.00
32	14.80	12.00	13.65	13.80
34	15.60	12.80	14.45	14.60
36	16.40	13.60	15.25	15.40
38	17.20	14.40	16.05	16.20
40	18.00	15.20	16.85	17.00
42	18.80	16.00	17.65	17.80
44	19.60	16.80	18.45	18.60
46	20.40	17.60	19.25	19.40
48	21.20	18.40	20.05	20.20
50	22.00	19.20	20.85	21.00
52	22.80	20.00	21.65	21.80
60	26.00	23.20	24.85	25.00
70	30.00	27.20	28.85	29.00
80	34.00	31.20	32.85	33.00

Ordering Information

HC-PBB 08 - * - N - * - * - H* - ** - R - P -06


PITCH: 0.8mm
 1= 0.8mm
 2= 0.8mm
 No. of Rows: 08
 04P=04P
 04F=04F
 04= 4Pin
 04= 4Pin

Nature: Male/Female
 Male/Female
 TYPE: (SEE LIST)

Plastic Height: H5.1=5.1mm
 Contact Plating: G1.1μ" Gold
 R=Reel
 Post (1.4)


		GENEAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO., LTD			
		DIM TOL	审 核 CHECK	产品名称 TITLE	BTB 0.8 单槽 母座 立式侧插 座高5.1mm 编带 带柱	版 本 REV.	A
		X.X ±0.30	批 准 APPROVAL	产品料号 PART NO.	HC-PBB08-1-N-F-S-H5.1-XX-R-P-06	单 位 UNITS	mm
		X.XX ±0.20	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/2
		X.XXX ±0.10					
		Angle ±3.0°					
1	初版发行	日期					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE					

Tape width 16 and 24 mm

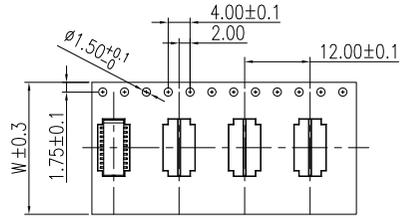

PULL OUT DIRECTION



Tape width 32 and 44 mm

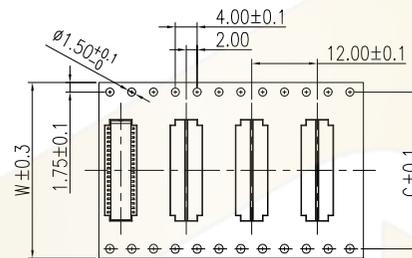

PULL OUT DIRECTION

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 5000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

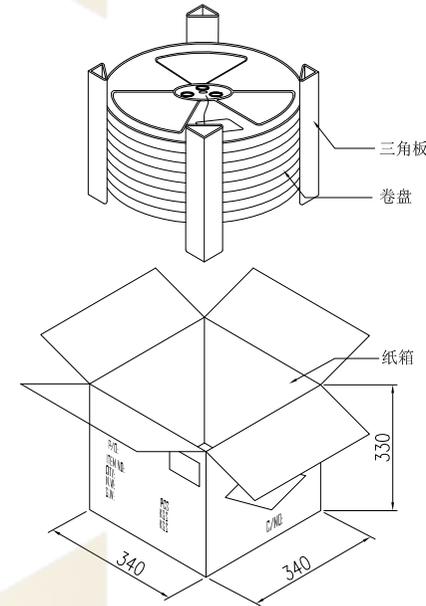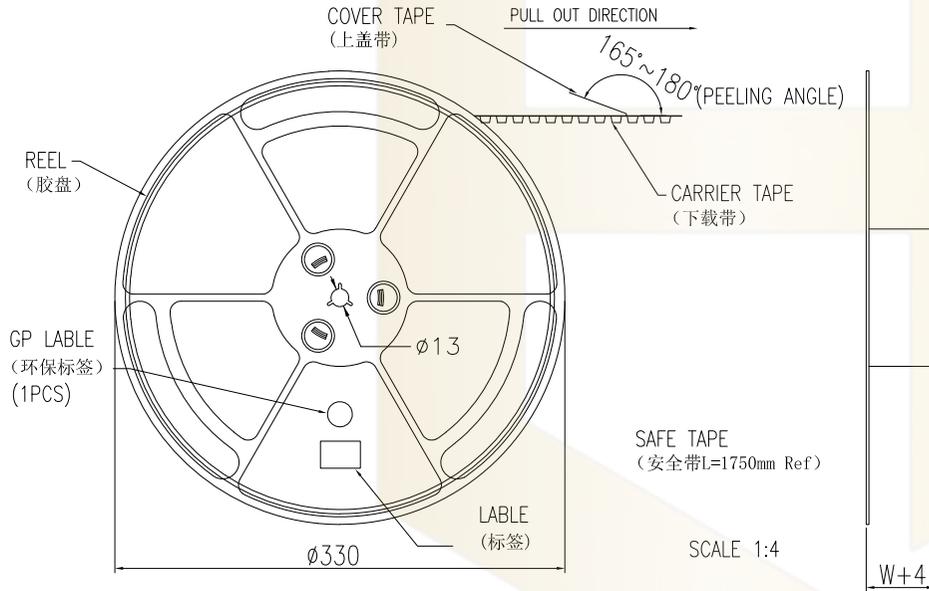

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~20PIN	16	-	1000	12	12000
21PIN~40PIN	24	-	1000	10	10000
41PIN~50PIN	32	28.4	1000	8	8000
51PIN~60PIN	44	40.4	1000	6	6000

			GENEAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianlueELECTRONICS CO.,LTD			
			DIM	TOL	审 核 CHECK		产 品 名 称 TITLE	BTB 0.8 单槽 母座 立式侧插 座高5.1mm 编带 带柱-包装图	版 本 REV.	A
			X. X	± 0.30	批 准 APPROVAL		产 品 料 号 PART NO.	HIC-PBB08-1-N-F-S-H5. 1-XX-R-P-06	单 位 UNITS	mm
1	初版发行		X. XX	± 0.20	投 影 Projection		材 料 MATERIAL		页 次 SHEET	2/2
序号 No.	变 更 内 容 MODIFY CONTENT	日 期 MODIFY DATE	X. XXX	± 0.10						
			Angle	$\pm 3.0^\circ$						