

Ass'y High(H)	Plastic High	
	Male (H1)	Female (H2)
1.50	1.14	1.45
2.00	1.14	1.95
2.50	1.14	2.40
3.00	1.14	2.90
3.50	1.14	3.40
4.00	1.14	3.90

NOTES:

MATERIAL:




- HOUSING: LCP. UL 94V-0 NATURE
- CONTACT: PHOSPHOR BRONZE
CONTACT: SEE ORDER INF ORMATION; SOLDER: GOLD FLASH
UNDERPLATING: 50~120u" NICKEL OVERALL

ELECTRICAL:

- CURRENT RATING: 0.3A
- VOLTAGE RATING 30V AC/DC
- CONTACT RESISTANCE: 90m MAX
- INSULATION RESISTANCE: 50MΩ MIN

ENVIRONMENTAL:

- OPERATING TEMPERATURE: -55°C TO +125°C

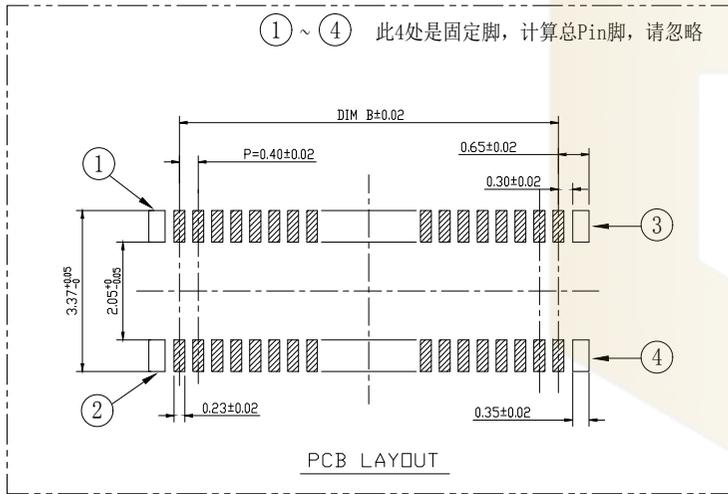

Pin	A	B	C
10	3.52	1.6	1.0
12	3.92	2.0	
16	4.72	2.8	
20	5.52	3.6	1.2
24	6.32	4.4	
30	7.52	5.6	1.5
34	8.32	6.4	2.3
40	9.52	7.6	3.2
50	11.52	9.6	
60	13.52	11.6	
70	15.52	13.6	
80	17.52	15.6	
90	19.52	17.6	
100	21.52	19.6	

Ordering Information

HC-PBB40C - NDP - 0.4V - 06

No. of Pins: 10=120Pin, 12=10Pin, 12=12Pin, ...

Nature: DP=Male, PITCH: 0.4V=0.4mm

			GENEAL TOLERANCE	制图 DRAWING	06	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核 CHECK		产品名称 TITLE	0.4 双槽 立贴 公座 (BTB)	版本 REV.	A
			X.X ±0.30	批准 APPROVAL		产品料号 PART NO.	HC-PBB40C-NDP-0.4V-06	单位 UNITS	mm
			X.XX ±0.20	比例 SCALE		材料 MATERIAL		页次 SHEET	1/1
			X.XXX ±0.10	投影 Projection					
			Angle ±3.0°						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE							