
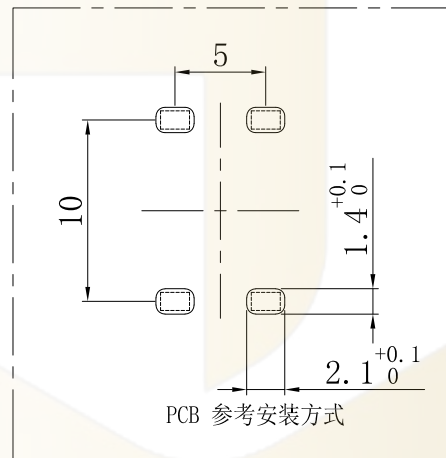



NOTES:

备注

1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M4
压线螺孔M4
3. Current Rating: 60A
额定电流: 60A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/P SERT	Product No.	Material
Pin (插脚)	0.8±0.05mm	M3 (螺牙)	2mm	1620#16x20mm	Pin		Brass (黄铜)
Pin Nut (螺母)	1.0±0.05mm	M3 (螺牙)	2mm	Pin		Brass (黄铜)
Pin Gasket (垫片)	1.5±0.05mm	M3 (螺牙)	4mm		Dip		Brass (黄铜)
Pin Gasket	2.0±0.05mm	M3 (螺牙)	6mm				Brass (黄铜)
Pin Gasket	2.5±0.05mm	M3 (螺牙)	8mm				Brass (黄铜)
Pin Gasket	3.0±0.05mm	M3 (螺牙)				Brass (黄铜)

			GENREL TOLERANCE	制图	07			
			DIM TOL	审核	深圳市华灿天禄电子有限公司			
			5 or more ±0.35	CHECK	ShenzhenhuacantianluELECTRONICS CO.,LTD			
			2~5 ±0.25	批准	产品名称	PCB 焊接端子 厚度1.0 插板 铆垫片	版本	A
			0~2 ±0.15	APPROVAL	TITLE	M4 4焊脚 11x9x9.7mm	REV.	
			Angle ±3.0°	比例	产品料号	HC-RG1044-1109-D326-07	单位	mm
序号	变更内容	日期	投影	投影	PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE	Projection	Projection	MATERIAL		SHEET	