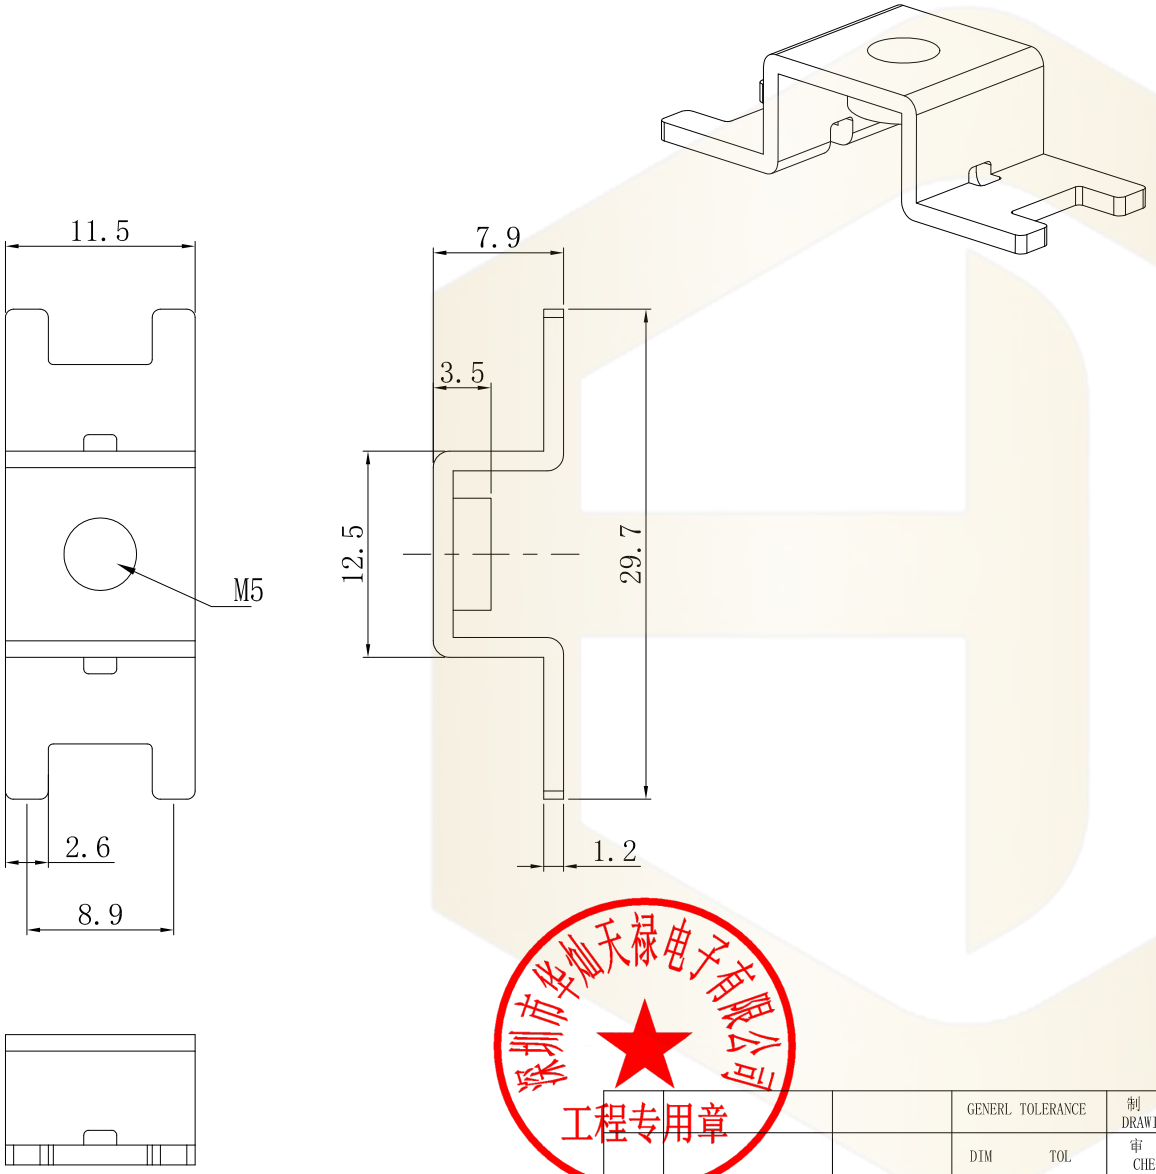

NOTES:
备注

1. Brass or purple copper, Bright tin-plating
   黄铜或紫铜，镀亮锡
2. Wire screw hole M5
   压线螺孔M5
3. Current Rating: 70A
   额定电流:70A
4. There shall be no defects such as pin deformation and burrs.
   不得有脚变形，毛刺等缺陷
5. Unmarked dimensions refer to tolerances
   未标注的尺寸参考公差

Ordering Information

HC - * ** * * - **** - * *** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series		Product No.	Material
I=Pull Teeth (拉牙) RV=Rivet Nut (铆螺母) RG=Rivet Gasker (铆垫片)	08=0.8mm 10=1.0mm 12=1.2mm 15=1.5mm 20=2.0mm 25=2.5mm 30=3.0mm 32=3.2mm	3=M3 (螺牙) 4=M4 (螺牙) 5=M5 (螺牙) 6=M6 (螺牙)	2=2个 1=1个 0=0个 3=3个	0808=8x8mm 1620=16x20mm	I=DIP S=SMT F1=Flag Dip	产品序号	默认=Copper (黄铜) R=Red Copper (紫铜)

工程专用章

序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE
1	初版发行	

GENERL TOLERANCE	
DIM	TOL
5 or more	±0.35
2~5	±0.25
0~2	±0.15
Angle	±3.0°

制 图 DRAWING	07
审 核 CHECK	
批 准 APPROVAL	
比 例 SCALE	
投 影 Projection	

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO.,LTD

产品名称 TITLE	PCB 焊接端子 厚度1.2 贴片 抽牙 M5 4焊脚 30x11.5x7.9mm	版 本 REV.	A
产品料号 PART NO.	HC-M1254-3011-S527-07	单 位 UNITS	mm
材 料 MATERIAL		页 次 SHEET	1/1