


NOTES:

备注

1. Brass or purple copper, Bright tin-plating  
黄铜或紫铜, 镀亮锡
2. Wire screw hole M5  
压线螺孔M5
3. Current Rating: 80A  
额定电流:80A
4. There shall be no defects such as pin deformation and burrs.  
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances  
未标注的尺寸参考公差

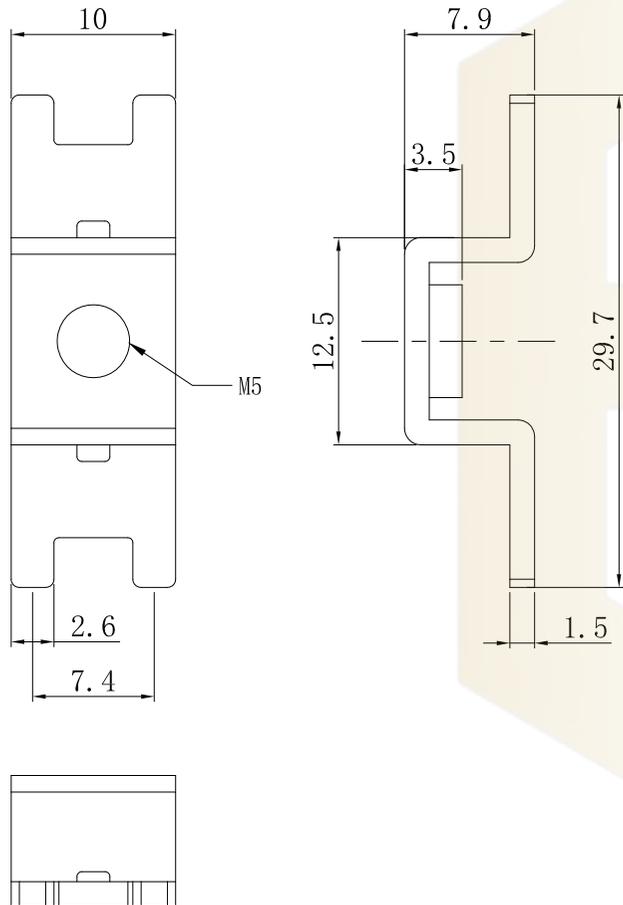

**Ordering Information**

HC - \* \*\* \* \* - \*\*\*\* - \* \*\* \* \* - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin Pitch	Product No.	Material
Weld Tip Tooth (插牙)	0.8~1.0mm	0.8~1.0mm	0.8~1.0mm	0.8~1.0mm	0.8~1.0mm	0.8~1.0mm	0.8~1.0mm
Rivet Nut (铆螺母)	1.0~1.2mm	1.0~1.2mm	1.0~1.2mm	1.0~1.2mm	1.0~1.2mm	1.0~1.2mm	1.0~1.2mm
Rivet Gasket (铆垫片)	1.5~1.7mm	1.5~1.7mm	1.5~1.7mm	1.5~1.7mm	1.5~1.7mm	1.5~1.7mm	1.5~1.7mm
	2.0~2.2mm	2.0~2.2mm	2.0~2.2mm	2.0~2.2mm	2.0~2.2mm	2.0~2.2mm	2.0~2.2mm
	2.5~2.7mm	2.5~2.7mm	2.5~2.7mm	2.5~2.7mm	2.5~2.7mm	2.5~2.7mm	2.5~2.7mm
	3.0~3.2mm	3.0~3.2mm	3.0~3.2mm	3.0~3.2mm	3.0~3.2mm	3.0~3.2mm	3.0~3.2mm

		GENERAL TOLERANCE		制图	07		<b>深圳市华灿天禄电子有限公司</b> ShenzhenhuacantianlueLECTRONICS CO.,LTD			
		DIM	TOL	审核						
		5 or more	±0.35	批准			产品名称	PCB 焊接端子 厚度1.5 贴片 插牙	版本	A
		2~5	±0.25	APPROVAL			TITLE	M5 4焊脚 30x10x7.9mm	REV.	
		0~2	±0.15	比例			产品料号	HC-M1554-3010-S722-07	单位	mm
序号	变更内容	日期		SCALE			PART NO.		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Angle	±3.0°	投影	MATERIAL		SHEET	