
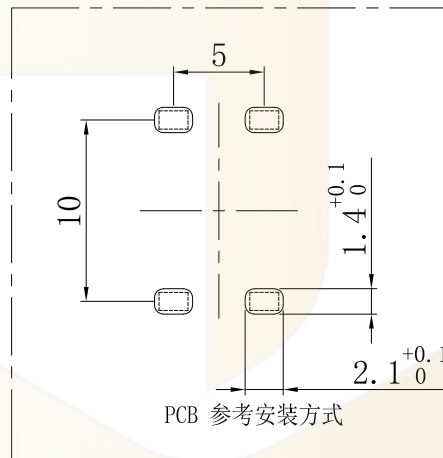



NOTES:

备注

1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
2. Wire screw hole M4
压线螺孔M4
3. Current Rating: 60A
额定电流: 60A
4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差



Ordering Information

HC - * ** * - **** - * ** * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/P	Product No.	Material
Pin (焊脚)	0.5±0.1mm	M3 (螺牙)	2mm	1620±0.20mm	Pin	产品序号	铜 (黄铜)
Pin Nut (螺螺母)	1.0±0.1mm	M3 (螺牙)	2mm	Pin	产品序号	铜 (紫铜)
Pin Gasket (螺垫片)	1.5±0.1mm	M3 (螺牙)	4mm	Pin	产品序号	铜 (紫铜)
Pin Gasket (螺垫片)	2.0±0.1mm	M3 (螺牙)	6mm	Pin	产品序号	铜 (紫铜)
Pin Gasket (螺垫片)	2.5±0.1mm	M3 (螺牙)	8mm	Pin	产品序号	铜 (紫铜)
Pin Gasket (螺垫片)	3.0±0.1mm	M3 (螺牙)	Pin	产品序号	铜 (紫铜)

			GENREL TOLERANCE	制图	07			深圳市华灿天禄电子有限公司 ShenzhenuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核							
			5 or more ±0.35	批准	产品名称			PCB 焊接端子 厚度1.0 插板 铆垫片		版本	A
			2~5 ±0.25	APPROVAL	TITLE			M4 4焊脚 11x9x10.2mm		REV.	
			0~2 ±0.15	比例	PART NO.			HC-RG1044-1109-D316-07		单位	mm
序号	变更内容	日期	Angle ±3.0°	投影	MATERIAL					页次	1/1
No.	MODIFY CONTENT	MODIFY DATE		Projection						SHEET	