


- NOTES:
备注
1. Brass or purple copper, Bright tin-plating
黄铜或紫铜, 镀亮锡
 2. Wire screw hole M4
压线螺孔M4
 3. Current Rating: 60A
额定电流: 60A
 4. There shall be no defects such as pin deformation and burrs.
不得有脚变形, 毛刺等缺陷
 5. Unmarked dimensions refer to tolerances
未标注的尺寸参考公差

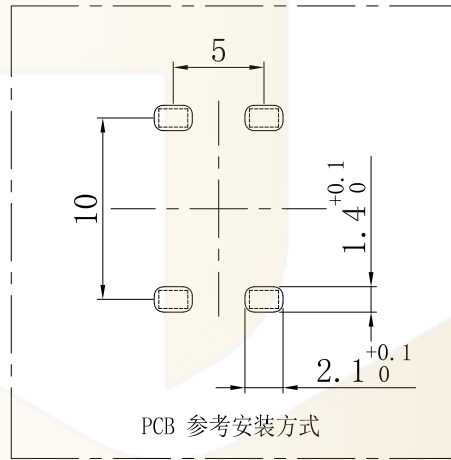

Ordering Information

HC - * ** * - * - * - * - * - * - 07

Type	Thickness	Screw Thread	Welding Feet	Series	Pin/P	Product No.	Material
Pin (铆钉)	0.8±0.05mm	0.8 (螺牙)	0.5mm	1620#16x20mm	Pin	产品序号	默认Copper (黄铜)
Pin Nut (铆螺母)	1.0±0.05mm	1.0 (螺牙)	0.5mm	Pin
Pin Gasket (铆垫片)	1.5±0.05mm	1.5 (螺牙)	0.5mm	Pin
Pin Gasket (铆垫片)	2.0±0.05mm	2.0 (螺牙)	0.5mm	Pin
Pin Gasket (铆垫片)	2.5±0.05mm	2.5 (螺牙)	0.5mm	Pin
Pin Gasket (铆垫片)	3.0±0.05mm	3.0 (螺牙)	0.5mm	Pin

		GENREL TOLERANCE		制图	07		深圳市华灿天禄电子有限公司 ShenzhenhuacuantianlueELECTRONICS CO., LTD			
		DIM	TOL	审核			产品名称	PCB 焊接端子 厚度1.0 插板 铆垫片	版本	A
		5 or more	±0.35	批准			TITLE	M4 4焊脚 11x10x15.2mm	REV.	
1	初版发行	2~5	±0.25	比例			产品料号	HC-RG1044-1110-D324-07	单位	mm
序号	变更内容	0~2	±0.15	SCALE			PART NO.		页次	1/1
No.	MODIFY CONTENT	Angle	±3.0°	投影			MATERIAL		SHEET	